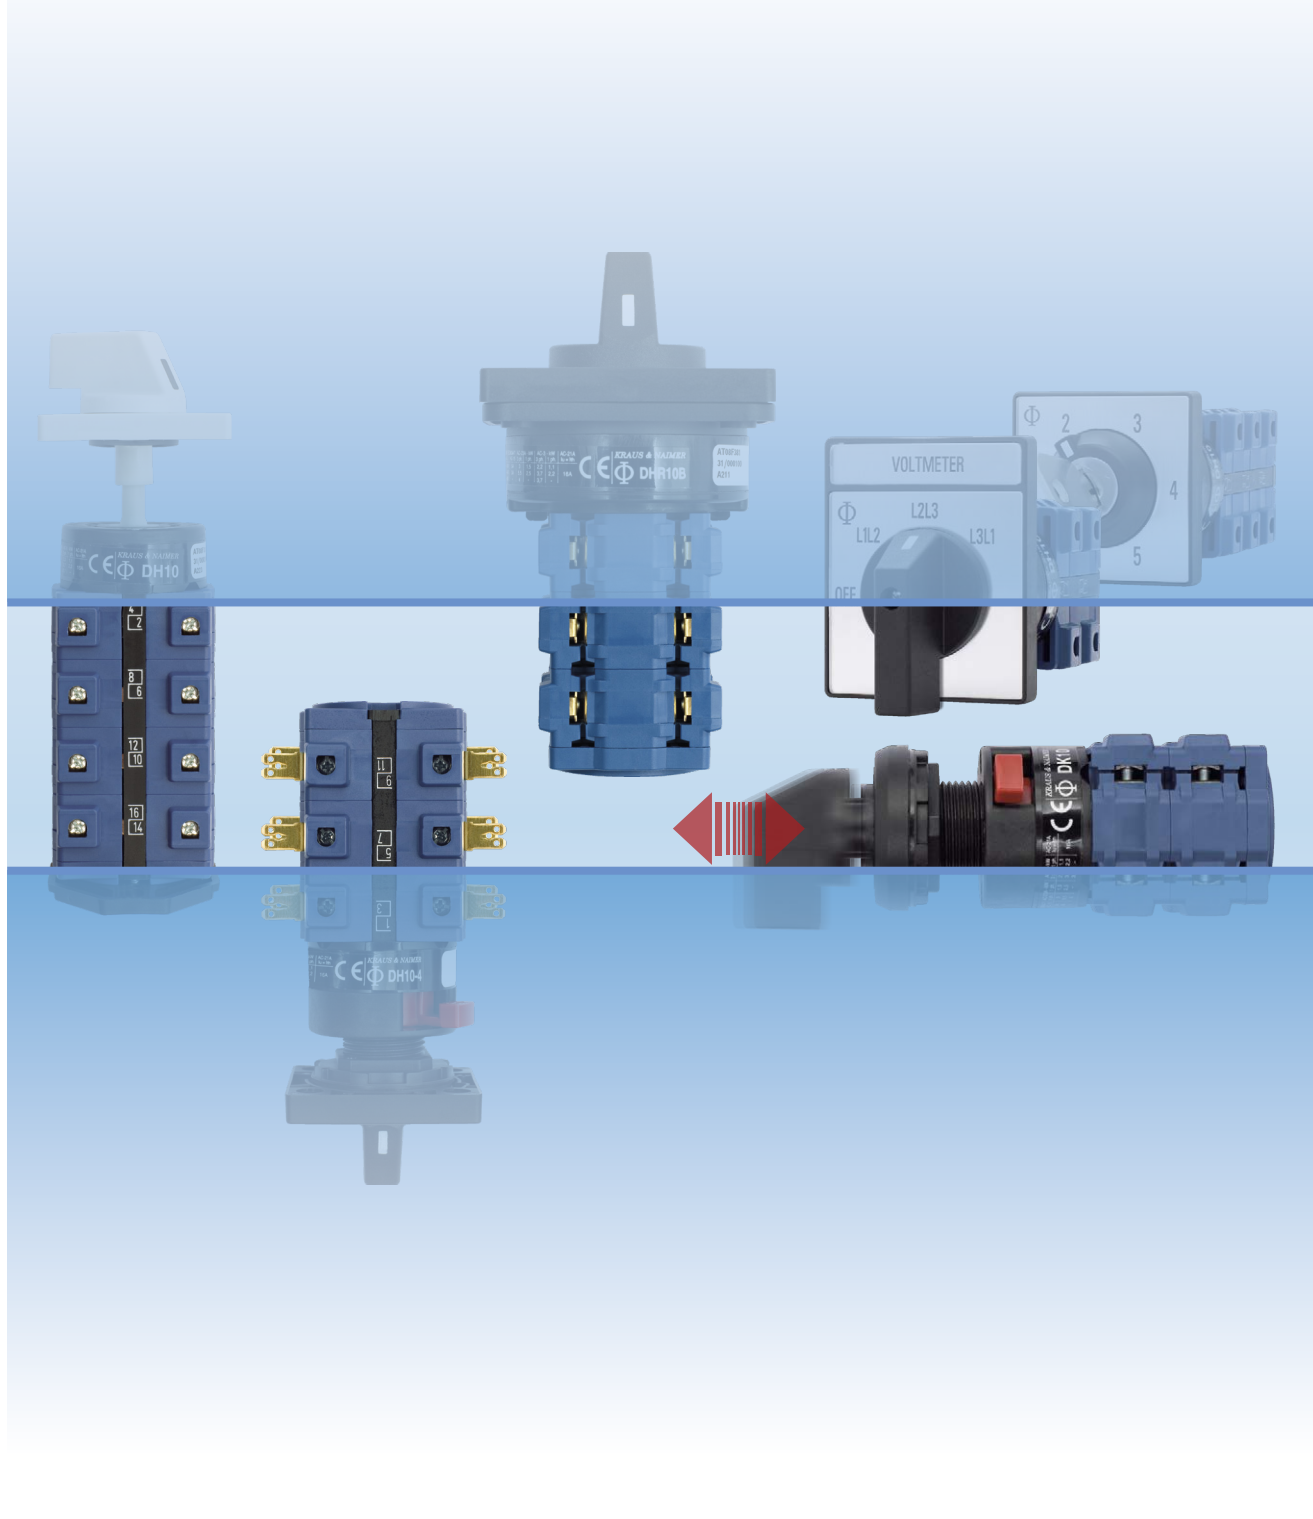


Control Switches for Special Applications

DH, DHR, DK and DKR type up to 16 A



Kraus & Naimer


The development of the Blue Line rotary switch and motor starter product ranges is based on more than hundred years experience by Kraus & Naimer in the design and manufacture of electrical switchgear. Kraus & Naimer pioneered the introduction of the cam operated rotary switch and continues to be recognized as the world leader in that product field.

BLUE LINE

Blue Line products are protected by numerous patents through-out the industrial world. They are built to national and international standards and designed to withstand adverse temperatures and climates.

Blue Line products are accepted and universally recognized for their quality and workmanship. They are supported by a worldwide sales and service organization.

The Kraus & Naimer Registered Trademark



WORLDWIDE SYMBOL
FOR QUALITY SWITCHGEAR

Disconnectors and Main Switches acc. to IEC 60947-3 see Catalog 500

Contents	Page
Construction Data	4
Dimensions and Nominal Ratings	5
How to order	6, 7
Switch Function and Configuration	
DH, DHR Switches (Turn to operate)	
ON/OFF Switches	9
Double-throw Switches	10, 11
Multi-step Switches	12-14
General Application Switches	15
Voltmeter Switches	16-17
Ammeter Switches	18, 19
Volt-ammeter Switches	20
Control Switches	20, 21
Motor Switches	21-23
DK, DKR Switches (Push to turn)	
Multi-step Switches	24-27
Voltmeter Switches	28, 29
Ammeter Switches	30
Control Switches	30
Types of Mounting	
Panel Mounting	31-33
Base Mounting	34
Wall Mounting	35
Face Plates	36, 37
Handles	38
International Standards and Approvals	39
Technical Data	40, 41
Tightening torque of screws	42
Dimensions	
Panel Mounting	43, 44
Base Mounting	44, 45
Wall Mounting	46
Overall Switch Lengths	46
Blue Line Switchgear: Summary	48

Construction Data

Cam switches of the DH, DHR, DK and DKR series are designed for universal applications and may ideally be used for control switches, instrumentation switches and circuit interrupters. Different contact designs, contact materials and terminals allow their use in electronic circuitry as well as in aggressive environments in accordance with IEC 60947-3, EN 60947-3 and VDE 0660 part 107.

Fully enclosed contact chambers provide optimum protection from dust and other contaminants.

The stage is the basis for all switches and can be supplied with a maximum of 2 contacts. The terminals are accessible from the side. All switches in this series are supplied with open terminals and are finger-proof according to EN 50274,

VDE 0660 part 514 and DGVV V3. Captive plus-minus terminal screws and integrated screwdriver guides facilitate wiring. Alternatively, the switches of the DH and DK series can be supplied with integrated quick connect terminals. Each quick connect terminal may accept either one 6.3 mm or two 2.8 mm quick connect lugs.

For connection with ring type terminals the DHR and DKR series of switches are available. These switches are supplied with large open terminals, which allow for connection without the need of removing the screws.

2 Contact Systems




Fig. 1





Fig. 2


A rigid double-break bridge with silver alloy contacts (DH10, DHR10, DK10, DKR10, DH10B) provides high making and breaking capabilities for regular control applications. (Fig. 1)

Self-cleaning H-bridges with a cross-wire contact system are used for electronic and low voltage range applications. They are available with either silver contacts (DH12, DHR12, DK12, DKR12, DH12B, DHR12B) or gold-plated contacts (DH11, DHR11, DK11, DH11B, DHR11B). This contact system offers maximum contact security, low resistance and virtually chatter free switching. (Fig. 2)

2 Methods of Contact Operation



Turning

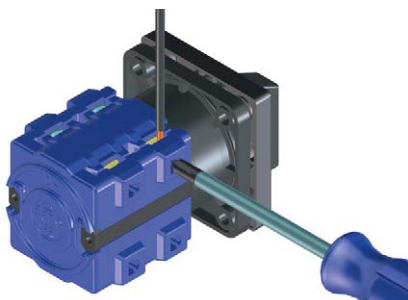


Turning and Pushing

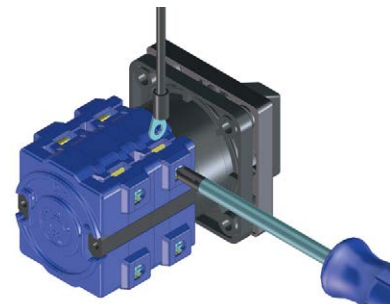

The contacts of the switches of the DH and DHR series can be manually operated by turning and the DK and DKR series by turning and/or pushing. This versatility of handle movement permits a countless variety of contact arrangements. Special pre-select programs enable the operator to rotate the handle to any one of up to 12 positions, while bypassing contact operation in all intermediate positions. Momentary contact operation for a pre-selected position occurs only when the handle is depressed. Releasing the handle returns switch operation to the normal plane.

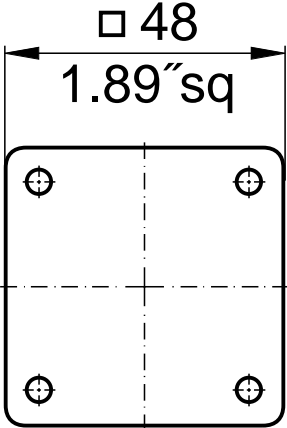
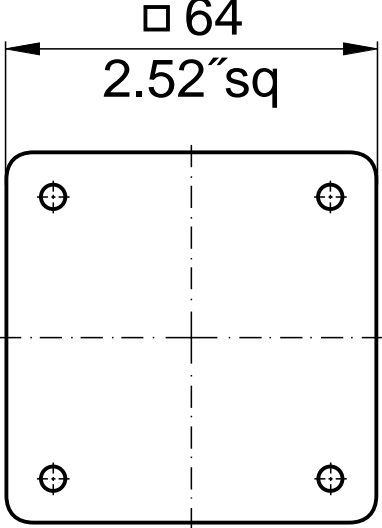
Type	Size	Possible Switching Angles	Max. No. of Stages
DH10-DHR12	S0	30°, 45°, 60°, 90°	12
DK10-DKR12	S0	30°, 60°, 90°	9
DH10B-DHR12B	S1	30°, 45°, 60°, 90°	12

DH and DK-series



DHR and DKR-series



Switch Size	Type	According to IEC/EN 60947-3 and VDE 0660 part 107				
		Insulation Voltage ¹ min.-max. U_i	Thermal Current I_u/I_{th}	Operational Current I_e 220 V-240 V AC-15		
		V	A	A		
S0 	DH10 DH11 DH12 DHR10 DHR11 DHR12	20-690 1 ² -600 6-600 20-690 1 ² -600 6-600	16 6 6 16 6 6	5 - - 5 - -		
			Operation by turning			
					5	
		DK10 DK11 DK12 DKR12	20-690 1 ² -600 6-600 6-600	16 6 6 6	- - - -	
			Operation by turning/pushing			
	S1 	DH10B DH11B DH12B DHR11B DHR12B	20-690 1 ² -600 6-600 1 ² -600 6-600	16 6 6 6 6	5 - - - -	
				Operation by turning		
						5
				For further technical details, refer to pages 40 and 41. To furnish with gold contacts and quick connects, refer to page 6.		

¹Valid for lines with grounded common neutral termination, overvoltage category III, pollution degree 3. Values for other supply systems on request. ²Values for lower voltages on request.

How to order

Disconnectors and Main Switches according to IEC 60947-3 see Catalog 500

Three types of data (shown below) are required for ordering Blue Line cam-operated switches. Code numbers for ordering are shown in this catalog.

1. Type of Switch

The type of switch required may be easily selected by referring to the table on page 5 which shows the thermal current, power rating and dimensions of each switch. For further technical details, refer to pages 40 and 41. Variations of contacts and terminals are shown below.

2. Switch Function

The code numbers for standard switches shown on pages 8-30 indicate the switch function, escutcheon plate, handle and any optional extras.

Additional coding to modify type and color of handle and escutcheon plate is explained below.

3. Type of Mounting

Types of mounting are shown on pages 31-35. Catalog **101** describes enclosures and optional extras.

Specify the mounting code to indicate required mounting.

DH10

A202-600

VE

Type of Switch

Extending the switch type coding the following combinations will define:

Amendment	Definition	For switch types
-1	with gold contacts ¹	DH10-1, DK10-1
-4	with integrated quick connects	DH10-4, DH11-4, DH12-4, DK10-4, DK12-4, DH11B-4, DH12B-4

¹Technical data on request.

Handles, Escutcheon Plates and Optional Extras

The handles for standard switches shown on pages 8-30 are suitable for mounting units with four hole panel mounting. Alternative types of handles available are illustrated on pages 31-35.

When a handle, escutcheon plate or optional extra is required but not covered by the dash number, the code number for the selected component should be entered separately. A comprehensive range of available standard escutcheon plates is illustrated on pages 36-38. Non-standard or special escutcheon plate engravings are available at extra cost. The large number of optional extras and enclosures is covered in Catalog **101**.

Switch Size

DH, DHR, DK and DKR switches are available in sizes S0 and S1. These size codes indicate the dimension of the mounting, the escutcheon plate and the handle, as well as the size of optional devices and enclosures. Page 5 lists these sizes and the various switch types they include.

How to order


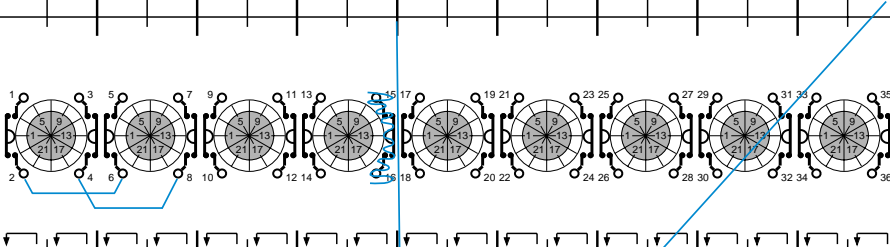
Ordering of Special Switches and Escutcheon Plates

When ordering special switches and special escutcheon plates, we recommend the use of our ordering form as shown in this example.

Contacts may be operated in 2 plains. Consequently, each contact has two columns in which the required contact function is to be indicated. The shaded column indicates function of the contact with depressed handle. This means that the switch handle may be depressed in each switching position. Rotation of the handle is possible only in the depressed position.

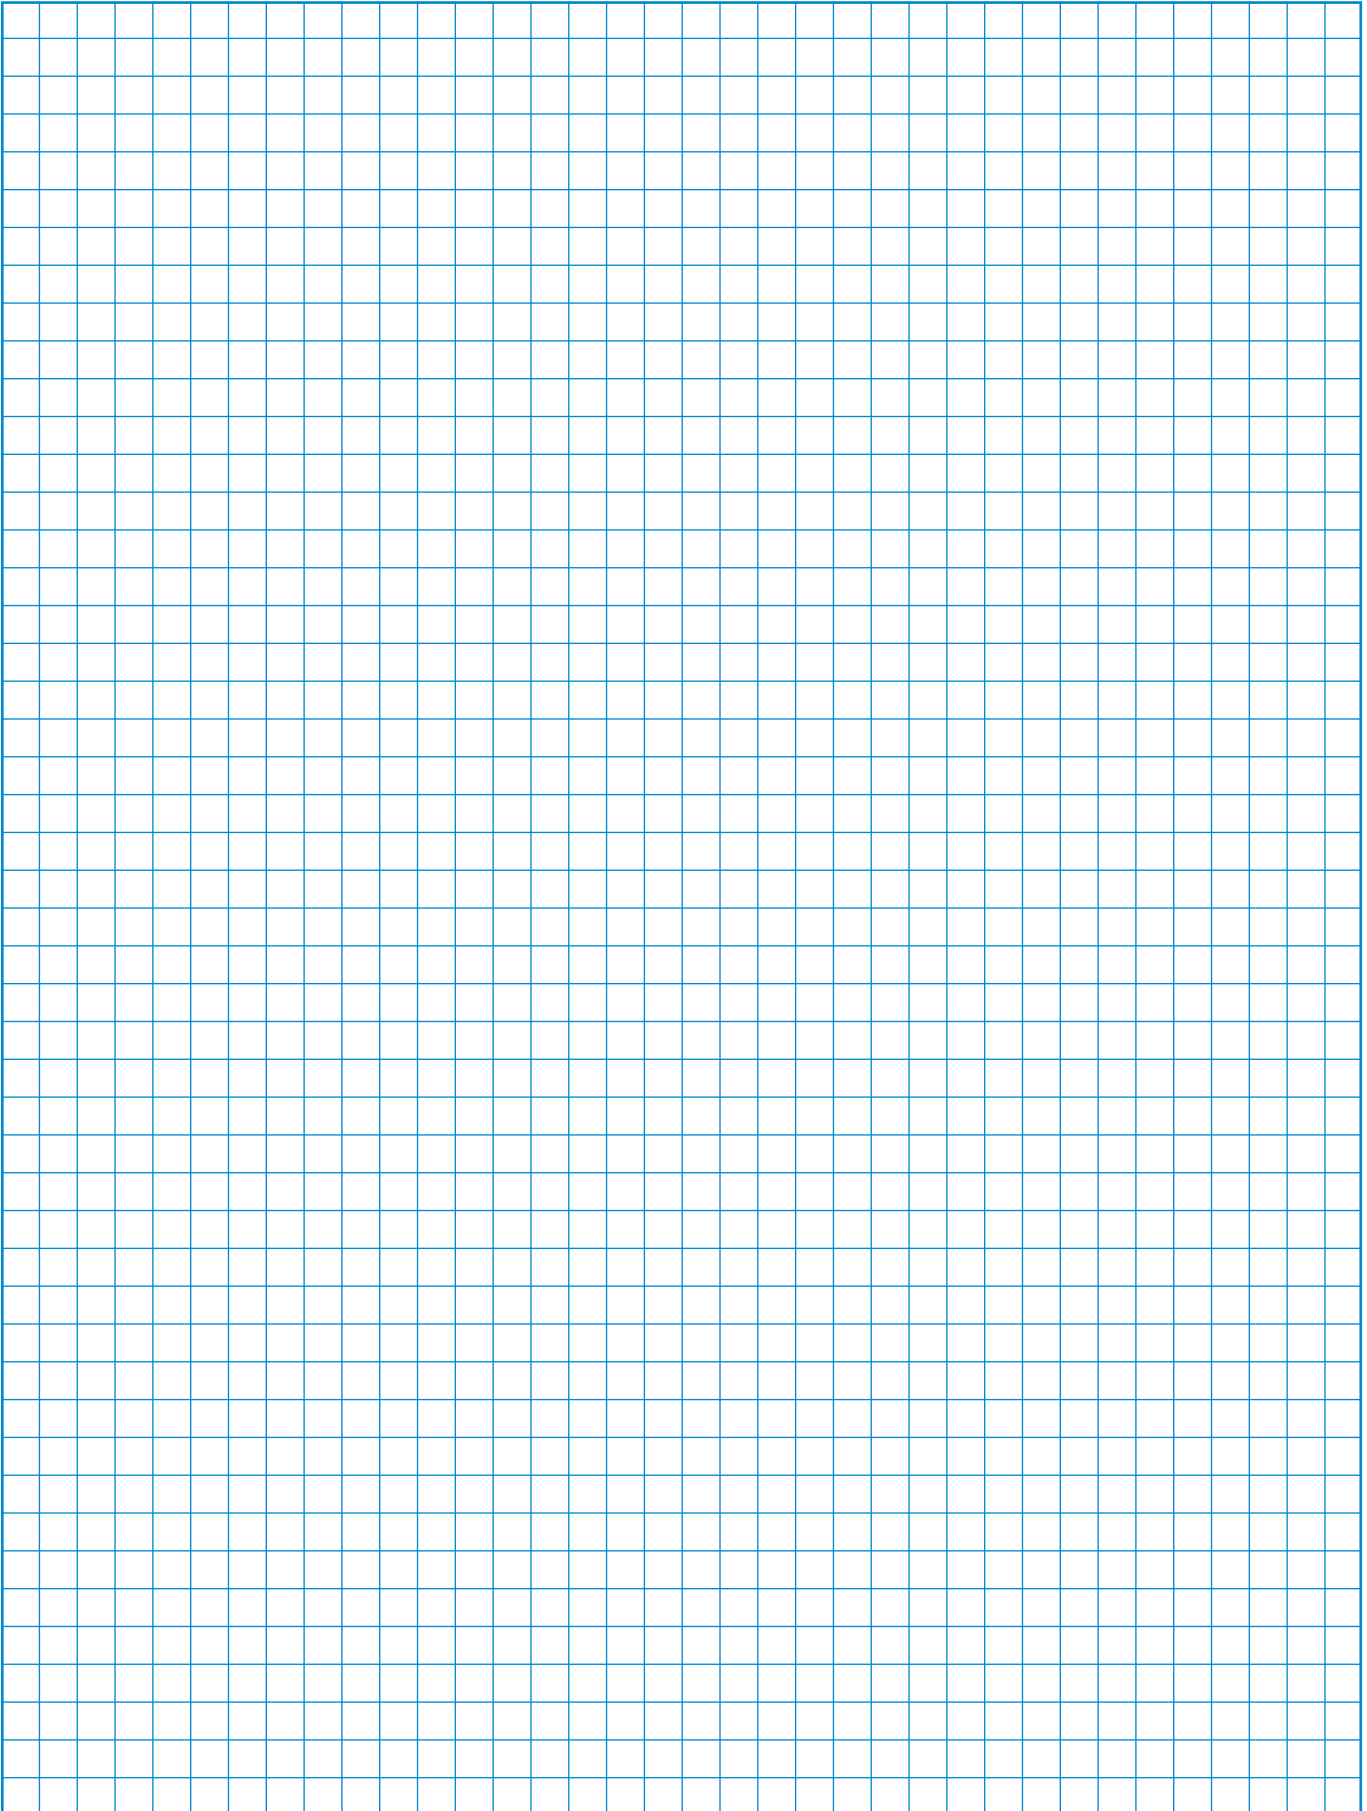
Contacts 1-2, 3-4, 11-12 and 5-6, 7-8, 9-10 close in position 1 or 3. Depressing the handle will not change the contact function. In position 1 or 3 contact 13-14 is closed. This contact opens if the handle is depressed.

[< back to table of contents >](#)

		D		CODE NO.	
					
POSITIONS					
	1	1	2	3	4
	2				
	3				
	4				
	5				
	6				
	7				
	8				
	9				
	10				
	11				
	12				
TYPE OF MOUNTING FT2		OPTIONAL EXTRAS		JUMPERS 1 ○ 3 ○ 4 ○ 2 ○ 2 ○ 7 ○ 8 ○ 6 ○ 3 ○ 9 ○ 11 ○ 12 ○ 10 ○ 4 ○ 13 ○ 15 ○ 16 ○ 14 ○ 5 ○ 17 ○ 19 ○ 20 ○ 18 ○ 6 ○ 21 ○ 23 ○ 24 ○ 22 ○ 7 ○ 25 ○ 27 ○ 28 ○ 26 ○ 8 ○ 29 ○ 31 ○ 32 ○ 30 ○ 9 ○ 33 ○ 35 ○ 36 ○ 34 ○	
ESCUTCH. PL.					
HANDLE, COLOR G 251					
LATCH. MECH.					
STOP					
CAMS					
NO. OF STAGES 1 POLE 2 POLE		SIG.		DATE	
				COMPANY	

Order forms are available on request.

Notes:



[< back to table of contents >](#)

Switch Function and Configuration




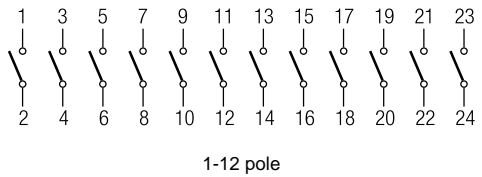






















DH, DHR Switches

Turn to operate

Function	Escutch. Plate	Type/Handle	Code	Stages	Connection Diagram
		DH10- DH10B- DHR12 DHR12B			




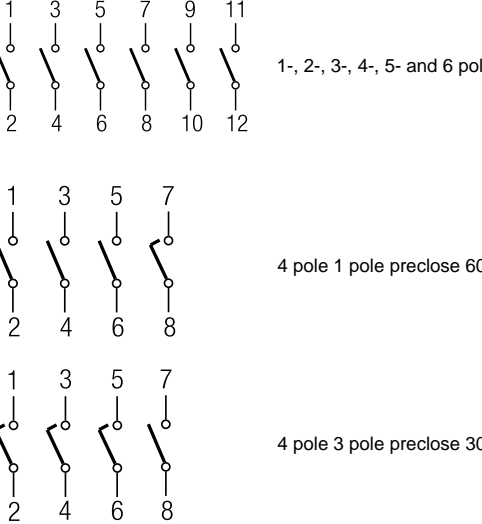

















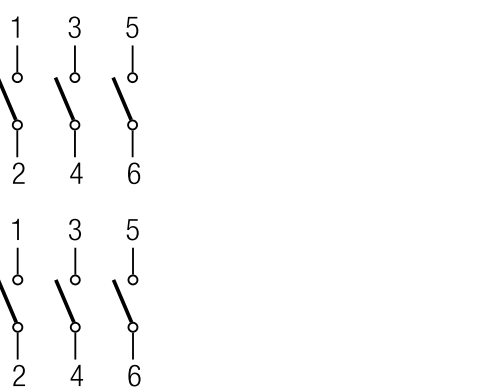

ON/OFF Switches with 60° Switching

[Dimensions p. 46](#)











1 pole	 <p>F070</p>			A200	1	
2 pole				A201	1	
3 pole				A202	2	
4 pole				A203	2	
5 pole				WAA341	3	
6 pole				A342	3	
7 pole				A343	4	
8 pole				A344	4	
9 pole				WAA345	5	
10 pole				A346	5	
11 pole				WAA347	6	
12 pole				A348	6	

ON/OFF Switches with 90° Switching

[< back to table of contents >](#)

1 pole contacts	 <p>F056</p>			A290	1	
2 pole preclose 30°				A291	1	
3 pole				A292	2	
4 pole				A324	2	
4 pole 1 pole preclose 60°				A293	2	
4 pole 3 pole preclose 30°				WAA327	2	
5 pole contacts				WAA325	3	
6 pole preclose 30°				A326	3	
3 pole 360° rotation	 <p>F062</p>			WAA208	2	
3 pole for foot operation				WAA386	2	





































ON/OFF Switches with Spring Return to „OFF“ 30° Switching

1 pole	 <p>F153</p>			A204	1	
2 pole				A205	1	
3 pole				WAA206	2	
4 pole				WAA207	2	












Function	Escutch. Plate	Type/Handle	Code	Stages	Connection Diagram
		DH10- DH10B- DHR12 DHR12B			

Double-throw Switches without „OFF“ 60° Switching








[Dimensions p. 46](#)

1 pole	 <p>F072</p>	           	           	<p>A220 A221 A222 A223 A369 A370 A371 A372 WAA373 WAA374 WAA375 WAA376</p>	1		<p>1 3 5 7 9 11 13 15 1 5 3 7 9 13 11 15 17 19</p>																				
2 pole					2				<p>2 4 6 8 10 12 14 2 4 6 8 10 12 18</p>																		
3 pole					3						<p>3 6 9 12 15 18 21 24 27 30 33 36</p>																
4 pole					4								<p>4 8 12 16 20 24 28 32 36</p>														
5 pole					5										<p>5 10 15 20 25 30 35 40 45 50 55 60</p>												
6 pole					6												<p>6 12 18 24 30 36 42 48 54 60</p>										
7 pole					7														<p>7 14 21 28 35 42 49 56 63 70 77 84</p>								
8 pole					8																<p>8 16 24 32 40 48 56 64 72 80 88 96</p>						
9 pole					9																		<p>9 18 27 36 45 54 63 72 81 90 99 108</p>				
10 pole					10																				<p>10 20 30 40 50 60 70 80 90 100 110 120</p>		
11 pole					11																						<p>11 22 33 44 55 66 77 88 99 110 121 132</p>
12 pole					12																						

Double-throw Switches without „OFF“ with electrically isolated contacts

1 pole	 <p>F072</p>	  	  	<p>A720 A721 A722 A723</p>	1		<p>1 3 5 7 9 11 13 15</p>				
2 pole					2				<p>2 4 6 8 10 12 14 16</p>		
3 pole					3						<p>3 6 9 12 15 18 21 24</p>
4 pole					4						
1 pole with spring return		1		<p>1 3 4</p>							




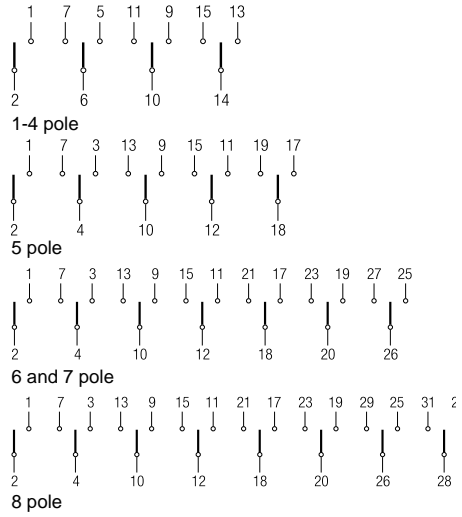
Double-throw Switches with Spring Return to Center

1 pole	 <p>F026</p>	 	 	<p>A295 A296 WAA297</p>	1		<p>1 3 5 7 9 11</p>		
2 pole					2				<p>2 4 6 8 10</p>
3 pole					3				

Function	Escutch. Plate	Type/Handle	Code	Stages	Connection Diagram
		DH10- DH10B- DHR12 DHR12B			





Double-throw Switches with Center „OFF“ 60° Switching

[Dimensions p. 46](#)









1 pole	 <p>F071</p>			A210	1	
2 pole				A211	2	
3 pole				A212	3	
4 pole				A213	4	
5 pole				A361	5	
6 pole				A362	6	
7 pole				WAA363	7	
8 pole				WAA364	8	

[< back to table of contents >](#)









Double-throw Switches with Center „OFF“ 90° Switching

1 pole contacts	 <p>F057</p>			A218	1		1-4 pole
2 pole preclose 30°				A219	2		
3 pole				WAA299	3		
4 pole 1 pole preclose 60°				WAA294	4		

Double-throw Switches with Center „OFF“ and electrically isolated contacts

1 pole	 <p>F071</p>			A710	1		1-4 pole
2 pole				A711	2		
3 pole				A712	3		
4 pole				A713	4		
1 pole with spring return to center	 <p>F025</p>			A714	1		1 and 2 pole
2 pole to center				A715	2		














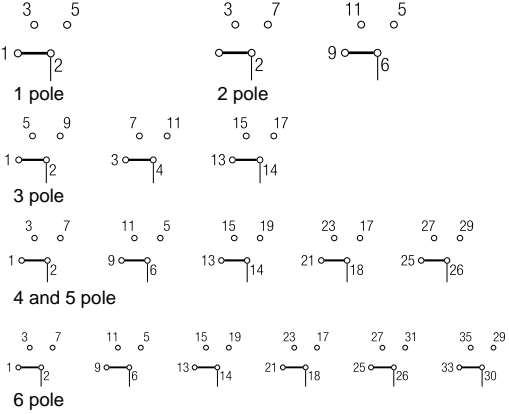











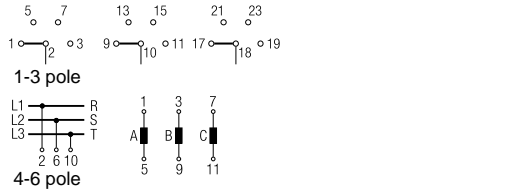

















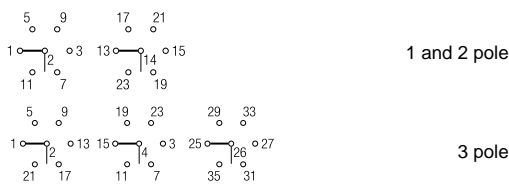
































Double-throw Switches with Spring Return to Center

1 pole with spring return to center	 <p>F025</p>			A214	1		1-3 pole
2 pole to center				A215	2		
3 pole				A216	3		
1 pole with spring return from left to center	 <p>F261</p>			A320	1		1-3 pole
2 pole from left to center				A321	2		
3 pole				A322	3		

Function	Escutch. Plate	Type/Handle	Code	Stages	Connection Diagram
		DH10- DH10B- DHR12 DHR12B			

Multi-step Switches without „OFF“

[Dimensions p. 46](#)

1 pole 3 Step 2 pole 3 pole 4 pole 5 pole 6 pole	 F076	     	     	A230 A250 A270 A476 WAA484 WAA489	2 3 5 6 8 9	
1 pole 4 Step 2 pole 3 pole 4 pole 5 pole 6 pole	 F077	    	    	A231 A251 A271 A477 WAA485 WAA490	2 4 6 8 10 12	
1 pole 5 Step 2 pole 3 pole 4 pole	 F078	   	   	A232 A252 WAA272 WAA478	3 5 8 10	
1 pole 6 Step 2 pole 3 pole	 F079	  	  	A233 WAA253 WAA273	3 6 9	
1 pole 7 Step 2 pole 3 pole	 F110	  	  	WAA234 WAA254 WAA274	4 7 11	
1 pole 8 Step 2 pole 3 pole	 F111	  	  	WAA235 WAA255 WAA275	4 8 12	
1 pole 9 Step	 F010			WAA236	5	
1 pole 10 Step	 F011			WAA237	5	
1 pole 11 Step	 F012			WAA238	6	
1 pole 12 Step	 F013			WAA239	6	

[< back to table of contents >](#)

Function	Escutch. Plate	Type/Handle DH10- DH10B- DHR12 DHR12B	Code	Stages	Connection Diagram
----------	----------------	---	------	--------	--------------------

Multi-step Switches without „OFF“ with electrically isolated contacts [Dimensions p. 46](#)

1 pole 3 Step				A730	2	<p>1 pole</p>
2 pole				A750	3	<p>2 pole</p>
1 pole 4 Step				A731	2	<p>1 pole</p>
2 pole				A751	4	<p>2 pole</p>

















































Multi-step Switches with „OFF“

1 pole 2 Step				A240	1	
2 pole				A260	2	
3 pole				A280	3	
4 pole				WAA480	4	
5 pole				WAA486	5	
6 pole				WAA491	6	
1 pole 3 Step				A241	2	
2 pole				A261	3	
3 pole				A281	5	
4 pole				A481	6	
4 pole				WAA487	8	
5 pole						

Function	Escutch. Plate	Type/Handle DH10- DH10B- DHR12 DHR12B	Code	Stages	Connection Diagram
----------	----------------	---	------	--------	--------------------

Multi-step Switches with „OFF“

[Dimensions p. 46](#)








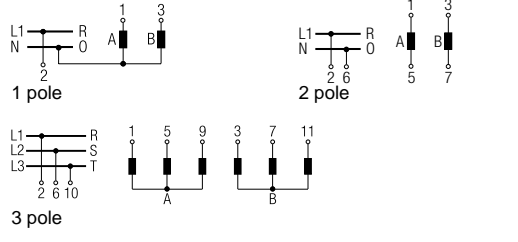







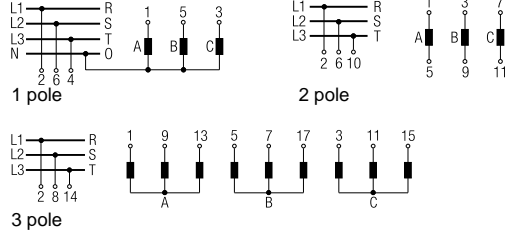







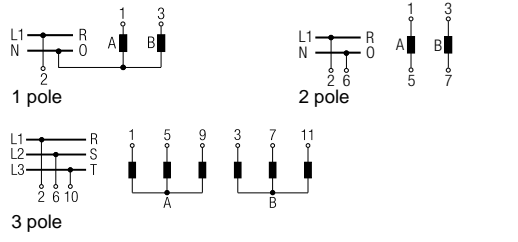




1 pole 4 Step 2 pole 3 pole 4 pole		   	   	A242 WAA262 WAA282 WAA482	2 4 6 8	 1-4 pole
1 pole 5 Step 2 pole 3 pole		  	  	A243 WAA263 WAA283	3 5 8	 1-3 pole
1 pole 6 Step 2 pole 3 pole		  	  	A244 WAA264 WAA284	3 6 9	 1-3 pole
1 pole 7 Step 2 pole		 	 	WAA245 WAA265	4 7	 1 pole 2 pole
1 pole 8 Step				WAA246	4	
1 pole 9 Step				WAA247	5	
1 pole 10 Step				WAA248	5	
1 pole 11 Step				WAA249	6	

[< back to table of contents >](#)

Function	Escutch. Plate	Type/Handle	Code	Stages	Connection Diagram
		DH10- DH10B- DHR12 DHR12B			

General Application Switches

[Dimensions p. 46](#)

<p>1 pole 2 Gang 2 pole Switching sequence: 3 pole 0, A, A+B</p>	 <p>F075</p>	  	  	<p>A310 A312 WAA314</p>	<p>1 2 3</p>	
<p>1 pole 3 Gang 2 pole Switching sequence: 3 pole 0, A, A+B, A+B+C</p>	 <p>F001</p>	  	  	<p>A311 WAA313 WAA315</p>	<p>2 3 5</p>	
<p>1 pole 2 Gang 2 pole Series switching 3 pole Switching sequence: 0, A, B, A+B</p>	 <p>F001</p>	  	  	<p>WAA330 WAA331 WAA332</p>	<p>1 2 3</p>	
<p>2 pole 2 Gang Series-parallel Switching</p> <p>Switching sequence: 0, A+B series, A, A+B parallel</p>	 <p>F001</p>			<p>WAA339</p>	<p>2</p>	

Switch Function and Configuration




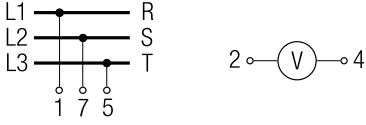




DH, DHR Switches

Turn to operate

Function	Escutch. Plate	Type/Handle	Code	Stages	Connection Diagram
		DH10- DH10B- DHR12 DHR12B			

Voltmeter Switches without „OFF“

[Dimensions p. 46](#)






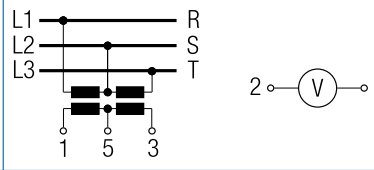

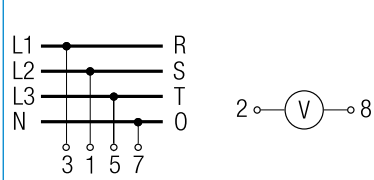


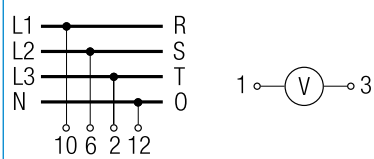


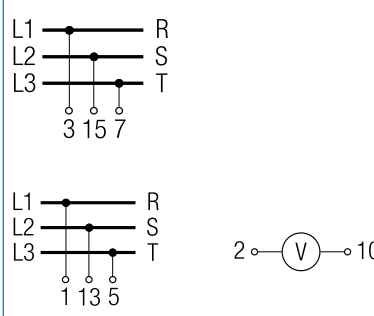


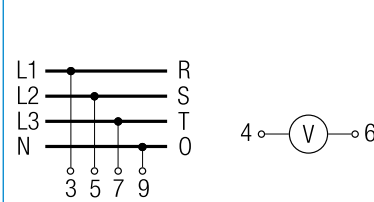
3 phase 3 wire				A023	2	
3 phase 3 wire 3 phase to phase and phase to neutral				A025	3	

[< back to table of contents >](#)

Function	Escutch. Plate	Type/Handle DH10- DH10B- DHR12 DHR12B	Code	Stages	Connection Diagram
----------	----------------	---	------	--------	--------------------

Voltmeter Switches with „OFF“




















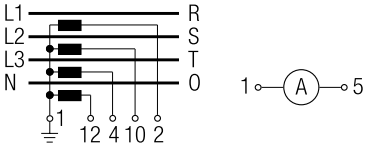


[Dimensions p. 46](#)

2 pole 360° rotation	 F170-PRL		WAA002	2	
3 phase 3 wire	 F775		A004		
	 F212-PRL		WAA011		
3 phase to neutral	 F779		WAA005		
3 phase to phase and 3 phase to neutral	 F782		A007	3	
2 separate 3 phase with center „OFF“	 F786		WAA008	4	
3 phase and 1 phase to neutral	 F789		WAA010	3	

Function	Escutch. Plate	Type/Handle DH10- DH10B- DHR12 DHR12B	Code	Stages	Connection Diagram
----------	----------------	---	------	--------	--------------------

Ammeter Switches

[Dimensions p. 46](#)

Single pole with one current transformer				WAA046	1	
Single pole with 3 current transformers without „OFF“				WAA017	3	
Single pole with 3 current transformers with „OFF“ 360° rotation				A048	3	
Single pole with 2 current transformers (3 readings)				WAA021	2	
Single pole with 4 current transformers				WAA036	4	
2 pole 2 current transformers				WAA037	3	

[< back to table of contents >](#)

Switch Function and Configuration













DH, DHR Switches

Turn to operate

Function	Escutch. Plate	Type/Handle DH10- DH10B- DHR12 DHR12B	Code	Stages	Connection Diagram
----------	----------------	---	------	--------	--------------------

Ammeter Switches

[Dimensions p. 46](#)

















2 pole 3 current transformers	 <p>F181-PRL</p>			WAA019	5	
	 <p>F059</p>			A038	5	
2 pole 4 current transformer	 <p>F060</p>			WAA039	6	

[< back to table of contents >](#)




























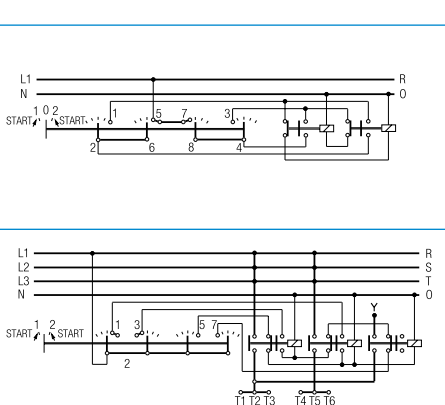




Function	Escutch. Plate	Type/Handle DH10- DH10B- DHR12 DHR12B	Code	Stages	Connection Diagram
----------	----------------	---	------	--------	--------------------

Volt-ammeter Switches

[Dimensions p. 46](#)

3 phase - phase to phase 3 current				WAA027	6	
				WAA028	7	
3 phase voltage 3 phase current 4 wire				WAA033	5	
3 phase voltage 3 phase current 3 wire				WAA035	5	
















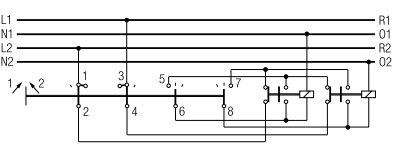




Control Switches

Stop switch				WAA174	1	
Start switch				A175	1	
Stop start switch single pole				A176	1	
Stop start switch 2 pole				WAA183	2	
Stop start switch with spring return from start to run				A178	1	
Stop start switch with spring return to run for 2 units				WAA177	2	
Stop start switch with spring return to run with contactor interlock contactors for 2 units				WAA182	2	
Motor voltage control switch				WAA150	2	

















Function	Escutch. Plate	Type/Handle	Code	Stages	Connection Diagram
		DH10- DH10B- DHR12 DHR12B			

Control Switches with electrically isolated contacts

[Dimensions p. 46](#)

Stop start switch single pole	 F024			A789	1	
Stop start switch with spring return to 1	 F119			A791	1	
Stop start switch with spring return to run for 2 units	 F121			WAA790	2	
Contactor control with spring return to „OFF“	 F025			WAA179	2	
Circuit breaker control	 F143-PRL			WAA537	2	

Motor Reversing Switches

2 pole	 F071			A400	2	
3 pole	 F071			A401	3	
3 pole with spring return to „OFF“	 F025			A228	3	
3 pole for use with reversing contactors	 F121			WAA402	4	

Function	Escutch. Plate	Type/Handle DH10- DH10B- DHR12 DHR12B	Code	Stages	Connection Diagram
----------	----------------	---	------	--------	--------------------

Star-delta Switches

[Dimensions p. 46](#)

Normalausführung				A410	4	
2 Drehrichtungen				WAA413	5	
Mit Verriegelungskontakt geschlossen in 0				WAA416	5	
Für Schützsteuerung				A419	4	









Motor Control Switches

2 speed single winding				A440	4	
2 speed single winding without „OFF“				A466	4	
2 speed single winding with center „OFF“				A441	4	
2 speed single winding reversing				A442	6	
2 speed single winding for use with contactors				WAA444	5	













Function	Escutch. Plate	Type/Handle DH10- DH10B- DHR12 DHR12B	Code	Stages	Connection Diagram
----------	----------------	---	------	--------	--------------------

Motor Control Switches

[Dimensions p. 46](#)

2 speed 2 winding 0-A-B Υ or Δ	 F073			WAA451	3	
3 speed 2 winding 0-A Δ -B Υ -A $\Upsilon\Upsilon$	 F109			WAA457	6	



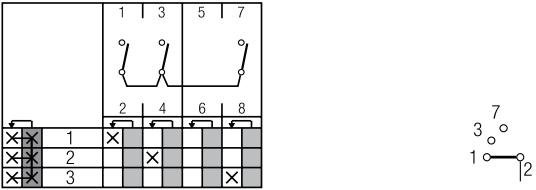


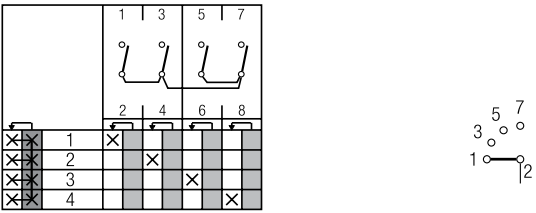


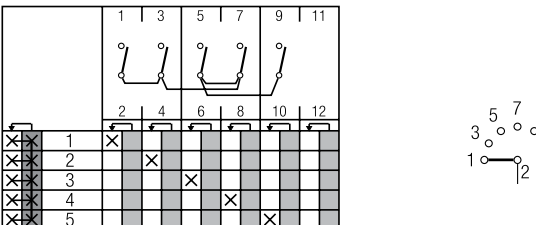


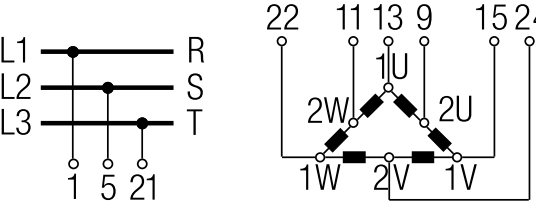


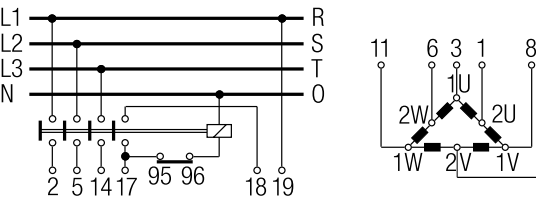


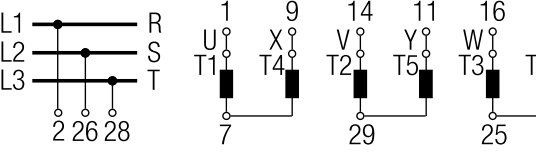
Start and Run Switches

Split-phase start	 F119			A425	2	
Split-phase start reversing	 F120			WAA426	3	
Split-phase reversing, auto cut-out of start field winding	 F104			WAA622	3	

Function	Escutch. Plate	Handle	Code	Stages	Connection Diagram
----------	----------------	--------	------	--------	--------------------

Multi-step Switches without „OFF“

[Dimensions p. 46](#)



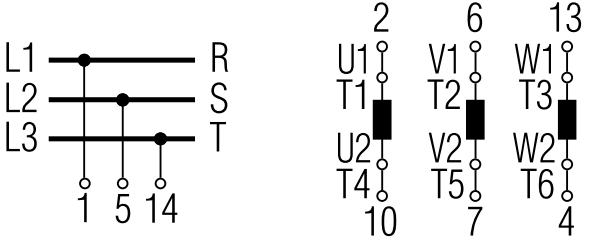


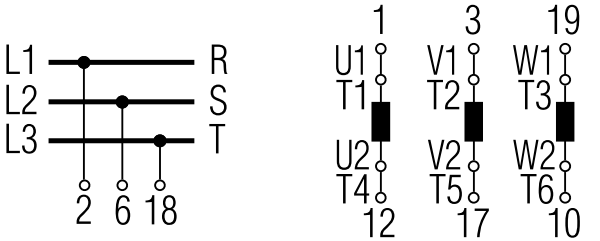


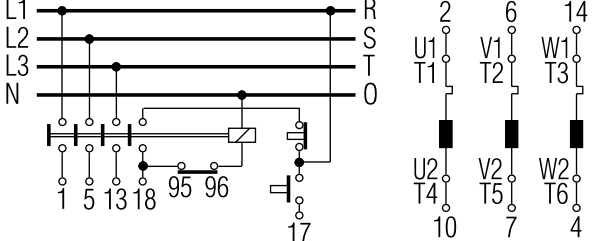


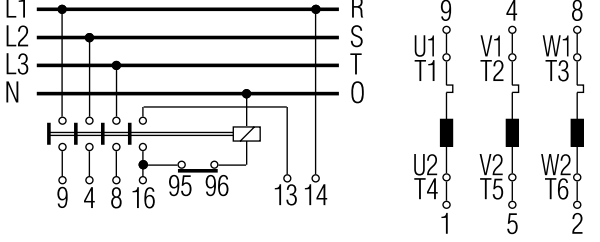
1 pole 3 Step	 F161		WAA830	2	
1 pole 4 Step	 F052		WAA831	2	
1 pole 5 Step	 F055		WAA832	3	
1 pole 6 Step	 F138		WAA833	3	
1 pole 7 Step	 F135		WAA834	4	
1 pole 8 Step	 F136		WAA835	4	

Rotation only in pushed position. Contacts are closed only in normal position. Therefore, one or more positions of a multi-step switch can be passed without contact operation.

Function	Escutch. Plate	Handle	Code	Stages	Connection Diagram
----------	----------------	--------	------	--------	--------------------

Multi-step Switches without „OFF“

Dimensions p. 46



















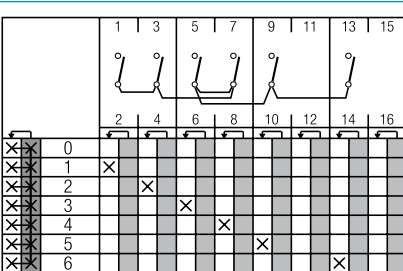



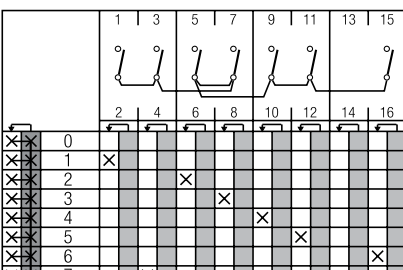

1 pole 9 Step	 F010		WAA836	5	 <p>Diagram showing three main lines L1, L2, L3 connected to terminals R, S, T. Terminal 1 is connected to L1, 5 to L2, and 14 to L3. On the right, three switch assemblies are shown: U1/T1, V1/T2, and W1/T3. Each assembly has two terminals: U2/T4, V2/T5, and W2/T6. The terminal numbers are 2, 6, 13 at the top and 10, 7, 4 at the bottom.</p>
1 pole 10 Step	 F011		WAA837	5	 <p>Diagram showing three main lines L1, L2, L3 connected to terminals R, S, T. Terminal 2 is connected to L1, 6 to L2, and 18 to L3. On the right, three switch assemblies are shown: U1/T1, V1/T2, and W1/T3. Each assembly has two terminals: U2/T4, V2/T5, and W2/T6. The terminal numbers are 1, 3, 19 at the top and 12, 17, 10 at the bottom.</p>
1 pole 11 Step	 F012		WAA838	6	 <p>Diagram showing three main lines L1, L2, L3 and a neutral line N. Terminals 1, 5, 13, 18 are connected to L1, L2, L3, N respectively. Terminals 95 and 96 are also shown. On the right, three switch assemblies are shown: U1/T1, V1/T2, and W1/T3. Each assembly has two terminals: U2/T4, V2/T5, and W2/T6. The terminal numbers are 2, 6, 14 at the top and 10, 7, 4 at the bottom.</p>
1 pole 12 Step	 F013		WAA839	6	 <p>Diagram showing three main lines L1, L2, L3 and a neutral line N. Terminals 9, 4, 8, 16 are connected to L1, L2, L3, N respectively. Terminals 95 and 96 are also shown. On the right, three switch assemblies are shown: U1/T1, V1/T2, and W1/T3. Each assembly has two terminals: U2/T4, V2/T5, and W2/T6. The terminal numbers are 9, 4, 8 at the top and 1, 5, 2 at the bottom.</p>

Rotation only in pushed position. Contacts are closed only in normal position. Therefore, one or more positions of a multi-step switch can be passed without contact operation.

Function	Escutch. Plate	Handle	Code	Stages	Connection Diagram
----------	----------------	--------	------	--------	--------------------

Multi-step Switches with „OFF“

[Dimensions p. 46](#)




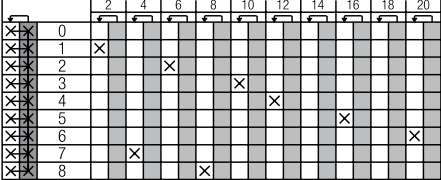




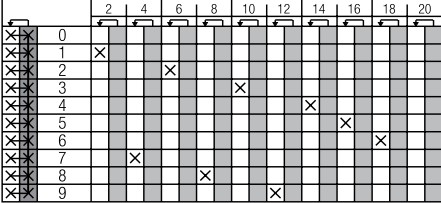




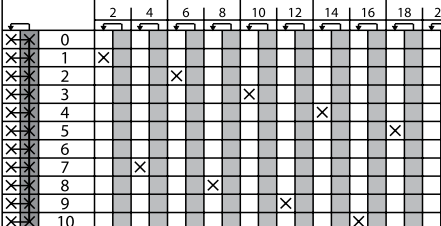




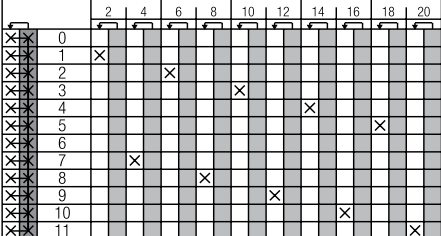

1 pole 2 Step	 F053		WAA840	1	 
1 pole 3 Step	 F001		WAA841	2	 
1 pole 4 Step	 F002		WAA842	2	 
1 pole 5 Step	 F003		WAA843	3	 
1 pole 6 Step	 F004		WAA844	4	 
1 pole 7 Step	 F005		WAA845	4	 

Rotation only in pushed position. Contacts are closed only in normal position. Therefore, one or more positions of a multi-step switch can be passed without contact operation.

Function	Escutch. Plate	Handle	Code	Stages	Connection Diagram
----------	----------------	--------	------	--------	--------------------

Multi-step Switches with „OFF“

Dimensions p. 46



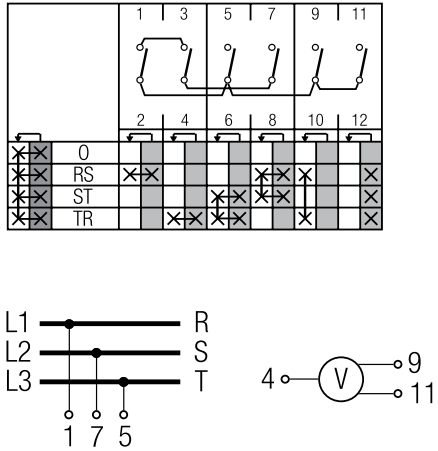


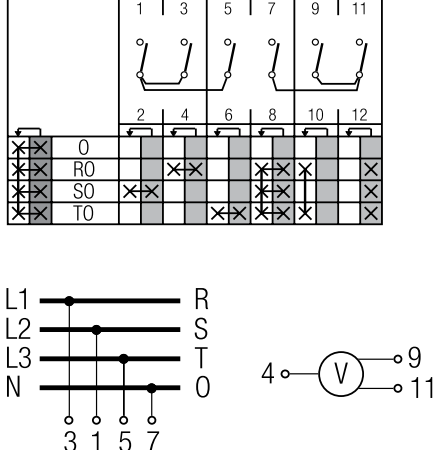


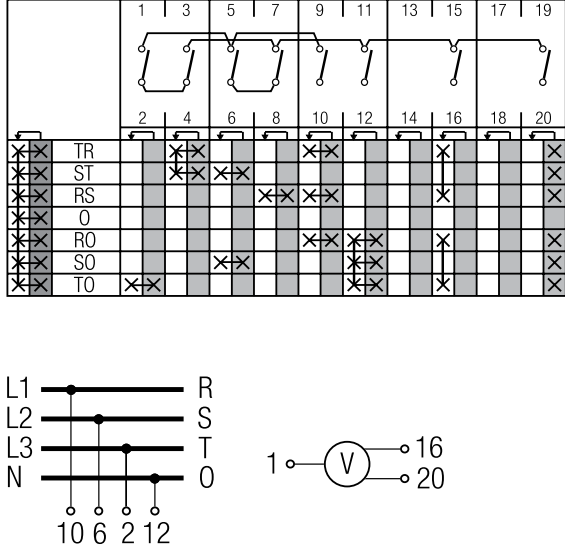
1 pole 8 Step	 F006		WAA846	4	  
1 pole 9 Step	 F009		WAA847	5	  
1 pole 10 Step	 F008		WAA848	5	  
1 pole 11 Step	 F009		WAA849	6	  

Rotation only in pushed position. Contacts are closed only in normal position. Therefore, one or more positions of a multi-step switch can be passed without contact operation.

Function	Escutch. Plate	Handle	Code	Stages	Connection Diagram
----------	----------------	--------	------	--------	--------------------

Voltmeter Switches with „OFF“



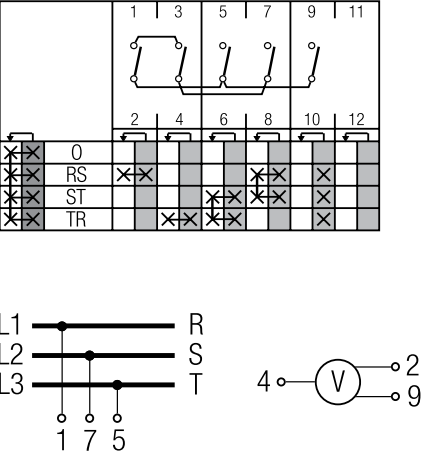


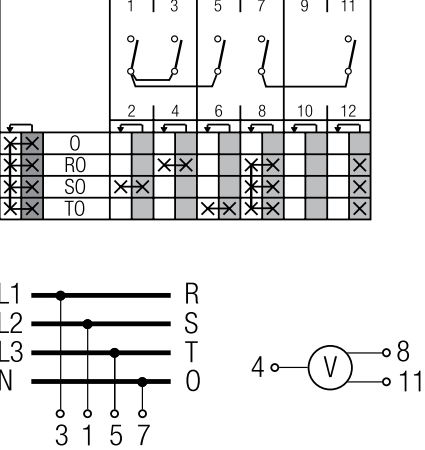


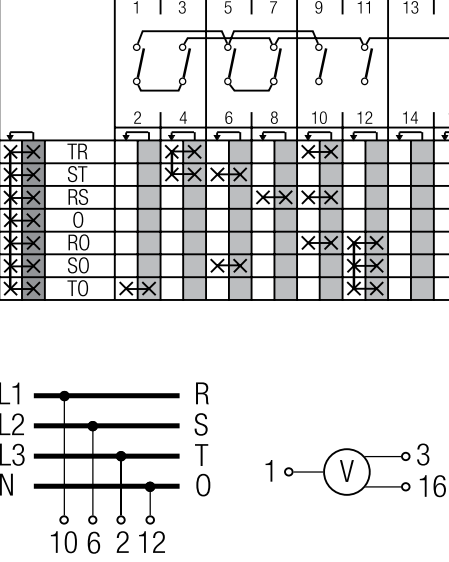
Dimensions p. 46

<p>For 2 measuring ranges by additional NO and NC contacts operated by pushing handle</p>	 <p>F019</p>		<p>WAA804</p>	<p>3</p>	
<p>For 2 measuring ranges by additional NO and NC contacts operated by pushing handle</p>	 <p>F018</p>		<p>WAA805</p>	<p>3</p>	
<p>For 2 measuring ranges by additional NO and NC contacts operated by pushing handle</p>	 <p>F020</p>		<p>WAA807</p>	<p>5</p>	

Function	Escutch. Plate	Handle	Code	Stages	Connection Diagram
----------	----------------	--------	------	--------	--------------------

Voltmeter Switches with „OFF“



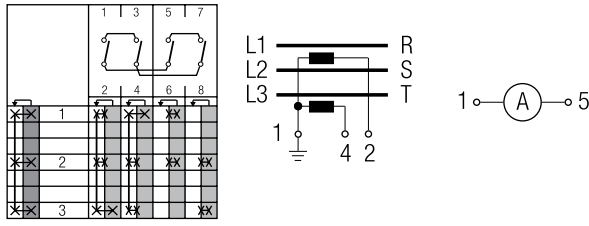
Dimensions p. 46

<p>(as A804) for 2 measuring ranges by additional NO contact operated by pushing handle</p>	 <p>F019</p>		<p>WAA814</p>	<p>3</p>	
<p>(as A805) for 2 measuring ranges by additional NO contact operated by pushing handle</p>	 <p>F018</p>		<p>WAA815</p>	<p>3</p>	
<p>(as A807) for 2 measuring ranges by additional NO contact operated by pushing handle</p>	 <p>F020</p>		<p>WAA817</p>	<p>4</p>	



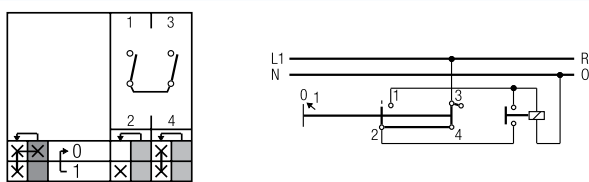


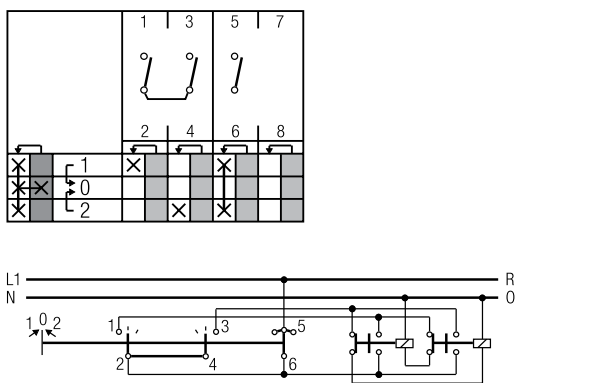


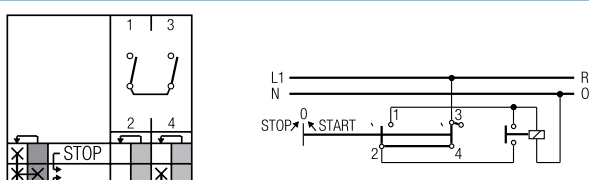


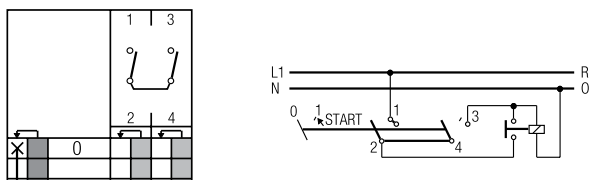
Function	Escutch. Plate	Handle	Code	Stages	Connection Diagram
----------	----------------	--------	------	--------	--------------------

Ammeter Switches




[Dimensions p. 46](#)

Single pole with 2 current transformers (3 readings)	 <p>F719</p>		WAA021	2	
--	---	---	--------	---	--

Steuerschalter





Control switch for contactor control, closing by rotating, tripping by pushing in „OFF“ position	 <p>F169</p>		WAA874	1	
Control switch for 2 NO and 1 NC contacts	 <p>F025</p>		WAA875	2	
Control switch 1pole with additional emergency cut-out by pushing in „OFF“ position	 <p>F024</p>		WAA876	1	
Control switch stop start switch with spring return from start to position 1, with additional emergency cut-out by pushing in position 1	 <p>F119</p>		WAA878	1	

Two or Four Hole Panel Mounting	Terminals rotated 90°	Code	DH.. DHR..	DH..B DHR..B	DK.. DKR..
---------------------------------	-----------------------	------	------------	--------------	------------

 <p>Panel mounting</p> <p>Four hole panel mounting, Protection IP 40</p> <p>Four hole panel mounting, Protection IP 66/67/69k</p> <p>Two hole panel mounting, Protection IP 66/67/69k</p>	<p>●</p> <p>●</p> <p>●</p>	<p>E E-V</p> <p>EF EF-V</p> <p>E22 E22-V</p>	<p>●</p> <p>●</p> <p>●</p>	<p>●</p> <p>●</p> <p></p>	<p>●</p> <p></p> <p></p>
 <p>Panel mounting using larger escutcheon plate and handle and with heavy duty latching</p> <p>Four hole panel mounting, Protection IP 40</p> <p>Four hole panel mounting, Protection IP 66/67/69k</p>	<p></p> <p></p>	<p>EG</p> <p>EGF</p>	<p>●</p> <p>●</p>	<p></p> <p></p>	<p></p> <p></p>
 <p>Panel and base mounting</p> <p>Four hole mounting, Protection IP 40</p> <p>Four hole mounting, Protection IP 66/67/69k</p>	<p></p> <p></p>	<p>ER</p> <p>ERF</p>	<p>●</p> <p>●</p>	<p>●</p> <p>●</p>	<p></p> <p></p>

< back to table of contents >

Four Hole Panel Mounting	Code	DH.. DHR..	DH..B DHR..B
--------------------------	------	---------------	-----------------

 <p>Panel mounting with heavy duty latching and metal shaft</p> <p>Four hole panel mounting, Protection IP 40 Mounting plate, escutcheon plate and handle of size 0</p>	KN2	●	
 <p>Four hole panel mounting, Protection IP 40 Mounting plate, escutcheon plate and handle of size 1</p>	KN1	●	●
 <p>Four hole panel mounting, Protection IP 40 Mounting plate, escutcheon plate and handle of size 1 and 6 mm square metal shaft</p>	KD1	●	●
 <p>Panel mounting with protective cover</p> <p>Four hole panel mounting Protection front IP 40 rear IP 30</p>	EC	●	●
<p>Four hole panel mounting with additional shaft seal Protection front IP 40 rear IP 30</p>	ED	●	●

[< back to table of contents >](#)

Single Hole Mounting	Terminals rotated 90°	Code	DH.. DHR..	DK.. DKR..
----------------------	-----------------------	------	---------------	---------------

With locking nut and shaft seal



Without escutcheon plate,
Protection IP 66/67/69k



FT1
FT1-V

mm
22
22

mm
22
22



With square escutcheon plate,
Protection IP 66/67/69k



FT2
FT2-V

22
22

22
22

With size S1 square escutcheon plate and
heavy duty latching, Protection IP 66/67/69k



FH3
FH3-V

22
22

22
22



With rectangular escutcheon plate,
Protection IP 66/67/69k



FT6
FT6-V

22
22

22
22

With size S1 rectangular escutcheon plate and
heavy duty latching, Protection IP 66/67/69k



FH4
FH4-V

22
22

22
22








Mounting key for locking nut

S00 T170 09



< back to table of contents >

Base Mounting	Terminals rotated 90°	Code	DH.. DHR..	DH..B DHR..B
---------------	-----------------------	------	---------------	-----------------

	<p>Base mounting</p> <p>Base mounting - four hole, Protection IP 40</p> <p>For four hole base mounting and with integrated simplified door clutch, Protection IP 65</p> <p>For two hole base mounting, Protection IP 40</p>	<p>●</p> <p>●</p> <p>●</p>	<p>VE</p> <p>VE-V</p> <p>VF</p> <p>VF-V</p> <p>VE22</p> <p>VE22V</p>	<p>●</p> <p>●</p> <p>●</p> <p>●</p> <p>●</p> <p>●</p>	<p>●</p> <p>●</p> <p></p> <p></p> <p></p> <p></p>
	<p>For two hole base mounting and with integrated simplified door clutch, Protection IP 65</p>	<p>●</p>	<p>VF22</p> <p>VF22V</p>	<p>●</p> <p>●</p>	<p></p> <p></p>
	<p>Snap-on base mounting for track EN 60715</p> <p>¹Protection IP 40 ²Protection IP 60/69k</p>		<p>VE1</p>	<p>●¹</p>	<p>●²</p>
	<p>Snap-on base mounting for track EN 60715 with rectangular escutcheon plate for 45 mm standard knock-out, Protection IP 40</p>		<p>VE2</p>	<p>●</p>	
	<p>Snap-on base mounting for track EN 60715. Both the escutcheon plate for 45 mm standard knock-out and the handle are adjustable in height. Protection IP 40</p>		<p>VE21</p>	<p>●</p>	

[< back to table of contents >](#)

<p>Mounting Plates for Plaster Depth Boxes acc. to DIN 49073 and ÖNORM E8608</p>	<p>Code</p>	<p>DH.. DHR..</p>
---	--------------------	-----------------------

	<p>Plaster depth trim, Protection IP40</p>	<p>UE1</p>	<p>●</p>
	<p>With light, Protection IP40</p> <p>With facility for light addition, Protection IP40</p>	<p>UE2</p> <p>UE3</p>	<p>●</p> <p>●</p>

< back to table of contents >

Escutcheon Plates



Square and rectangular escutcheon plates are available for each size of switch. The escutcheon plate consists of a frame and a faceplate having the switch positions which is then embossed with hot-foil backing. The escutcheon plate frame is an essential part of the switch and serves as a bearing surface for the handle. If the switch is to be mounted without an escutcheon plate we would recommend for size S1 the handle bearing plate T100-04.

Standard Letterings Available

(Over 500 standard letterings, special letterings upon request.)

30° switching

45° switching

back to table of contents >

Face plates

60° switching

F707	F087	F088	F089	F133	F197	F198	F232	F243	F247	F263	F268	F310	F311	F323	F328	F352	F367
F379	F380	F470	F754	F072	F163	F164	F192	F193	F196	F230	F231	F234	F244	F257	F262	F264	F282
F288	F291	F313	F382	F441	F705	F721	F722	F750	F757	F758	F075	F076	F098	F220	F223	F356	F357
F377	F723	F071	F073	F080	F081	F085	F086	F090	F091	F092	F093	F094	F104	F194	F235	F237	F239
F240	F241	F249	F260	F269	F274	F281	F290	F292	F312	F314	F315	F316	F324	F331	F344	F354	F358
F359	F364	F370	F371	F373	F381	F385	F442	F444	F469	F732	F735	F759	F077	F100	F101	F102	F309
F342	F343	F361	F362	F363	F365	F366	F078	F191	F325	F326	F720	F074	F082	F096	F097	F195	F724
F256	F079	F083	F084	F095	F099	F185	F190	F199	F233	F236	F238	F242	F283	F725	F730	F731	F736
F737																	

[< back to table of contents >](#)

90° switching

F056	F063	F068	F134	F201	F251	F252	F346	F456	F058	F065	F069	F177	F178	F182	F208	F253	F254
F340	F360	F378	F458	F443	F700	F743	F057	F061	F064	F067	F171	F181	F205	F207	F209	F320	F349
F437	F445	F715	F719	F059	F060	F062	F066	F170	F172	F173	F174	F175	F176	F179	F180	F186	F188
F202	F204	F206	F250	F265	F266	F286	F318	F327	F338	F339	F425	F716	F717	F718	F726	F733	F751
F755	F756																

Miscellaneous

F119	F130	F122	F126	F125	F129	F225	F248	F261	F341	F345	F287	F123	F127	F145	F146	F148	F706						
F707	F245	F120	F124	F128	F131	F121	F132	F749										F990	F991	F801	F802	F803	F804
F805	F806	F807	F808	F809	F810	F811	F812	F813	F814	F815	F816	F817	F818	F819	F820	F821	F822						
F823	F824	F825	F826	F827	F828	F829	F830	F831	F832	F833	F834	F835	F837	F838	F839	F840	F841						

¹INTERRUPTEUR PRINCIPAL, OUVERTURE EN POSITION 0 ²INTERRUPTORE GENERALE, APRIRE SOLO CON MANIGLIA SU 0
³INTERRUPTOR PRINCIPAL, ABRIR ARMARIO SOLO EN POS. "0"

Handles

Type	Color	Code	Size	
			S0	S1




Type	Color	Code	Size	
			S0	S1

<p>R-Handle</p> 	black red	G001 G002	● ● ● ●	● ● ● ●
<p>F-Handle</p> 	black red	G221 G222	● ● ● ●	● ● ● ●
<p>S-Handle</p>  <p>S0 S1</p>	black red	G301 G302	● ● ● ●	● ● ● ●
<p>P-Handle</p>  <p>S0 S1</p>	black red	G211 G212	● ● ● ●	● ● ● ●
<p>O-Handle</p> 	black red	G321 G322	— —	● ● ● ●

<p>I-Handle</p> 	black red	G251 G252	● ● ● ●	● ● ● ●
<p>B-Handle</p> 	black red	G521 G522	● ● ● ●	● ● ● ●
<p>L-Handle</p> 	black red	G501 G502	— —	● ● ● ●
<p>K-Handle</p> 	black red	G411 G412	— —	● ● ● ●

[< back to table of contents >](#)

Country	Authority	Mark or Standard	DH10 DK10 DH10B	DHR10	DH11 DK11 DH11B	DHR11 DHR11B	DH12 DK12 DH12B	DHR12 DKR12 DHR12B
---------	-----------	------------------	-----------------------	-------	-----------------------	-----------------	-----------------------	--------------------------

USA/Canada	Underwriters Laboratories			●		●		●
			●		●		●	
International Electrical Commission (IEC) Recommendation		IEC 60947 ²	+	+	+	+	+	+
Russia Belarus Kazakhstan	Eurasian Conformity		●	+	●	+	●	+
<p>● Switch approved + Switch conforms to requirements</p> <p>¹Industrial switchgear is not required to bear a symbol but must conform to requirements. By referring to the specific specification on the product the manufacturer implies that these requirements have been met. ²IEC does not operate an approval scheme.</p>								

Selection Data	DH10	DK10	DHR10
	DH10B		

Rated Insulation Voltage U_e	IEC 60947-3 ¹ , EN 60947-3 ¹ VDE 0660 part 107 ¹ North America Min. operational voltage	V V V	690 600 20	690 600 20	690 600 20	
Rated Impulse Withstand Voltage U_{imp}		kV	6 ¹	4 ²	6 ¹	
Rated Thermal Current I_U/I_{th}	IEC 60947-3, EN 60947-3 VDE 0660 part 107 North America	A A	16 15	16 15	16 15	
Rated Operational Current I_e						
AC-21A	Switching of resistive loads, including moderate overloads	IEC 60947-3, EN 60947-3 VDE 0660 part 107	A	16	16	16
AC-15	Switching of control devices, contactors, valves etc.	IEC 60947-5-1, EN 60947-5-1 VDE 0660 part 200	110 V-240 V 380 V-440 V	A A	5 3	5 3
Pilot Duty	North America	Heavy	VAC	600	600	600
Ampere Rating	Resistive or low inductive loads	North America	A	15	15	15
Short Circuit Protection						
Max. fuse size	(gG-characteristic)	A	16	16	16	
Rated short-time withstand current	(1s-current)	A	120	120	120	
Rated Utilization Category	IEC 60947-3, EN 60947-3 VDE 0660 part 107					
AC-3	Direct-on-line starting, star-delta starting	3 phase 3 pole	220 V-240 V 380 V-440 V 500 V 660 V-690 V	kW	2,2 3,7 3,7 3,7	2,2 3,7 3,7 3,7
		1 phase 2 pole	110 V-120 V 220 V-240 V 380 V-440 V	kW	0,37 1,1 2,2	0,37 1,1 2,2
AC-23A	Frequent switching of motors or other high inductive loads	3 phase 3 pole	220 V-240 V 380 V-440 V 500 V 660 V-690 V	kW	3 5,5 5,5 4	3 5,5 5,5 4
		1 phase 2 pole	110 V-120 V 220 V-240 V 380 V-440 V	kW	0,55 1,5 2,5	0,55 1,5 2,5
Ratings	North America					
	Standard motor load	3 phase	110 V-120 V	HP	0,75	0,75
	DOL-Rating (similar AC-3)	3 pole	220 V-240 V 440 V-600 V	HP	1,5 3	1,5 3
		1 phase 2 pole	110 V-120 V 220 V-277 V 440 V-600 V	HP	0,25 0,5 1	0,25 0,5 1
Max. Permissible Wire Gage - Use copper wire only						
	Single-core or stranded wire		mm ² AWG		2x2,5 2x12	2x2,5 2x12
	Flexible wire (sleeving in accordance with DIN 46228) Flexible AWG wires (without sleeve)		mm ² AWG		2x2,5(1,5) 2x14	2x2,5(1,5) 2x14
	Connection with insulated ring and fork type terminals		mm		–	–
	Internal diameter		mm		–	≥3,2
	External diameter		mm		–	≤7,4
	Connection with quick connect terminations		mm		6,3	6,3
Min. Ambient Temperature of Stages					-25 °C (valid only without optional extra)	
Max. Ambient Temperature of Stages ^{3, 4}					55 °C during 24 hours with peaks up to 60 °C	
					35 °C during 24 hours with peaks up to 40 °C	

[< back to table of contents >](#)

¹Valid for lines with grounded common neutral termination, overvoltage category III, pollution degree 3. Values for other supply systems on request.
²Valid for lines with grounded common neutral termination, overvoltage category II, pollution degree 3. ³For electromagnetic optional extras see additional data in Catalog 101. ⁴Storage temperature: -40 °C to 85 °C (in case of temperature below -5 °C no shock load permissible).

Selection Data	DH11	DHR11	DH12	DHR12
	DK11 ²	DHR11B	DK12 ²	DKR12 ²
	DH11B		DH12B	DHR12B

[< back to table of contents >](#)

Rated Insulation Voltage U_e	IEC 60947-3 ¹ , EN 60947-3 ¹ VDE 0660 part 107 ¹	V	600	600	600	600
	North America	V	600	600	600	600
	min. voltage	V	1 ³	1 ³	6	6
Rated Impulse Withstand Voltage U_{imp}			on request			
Rated Thermal Current I_U/I_{th}	IEC 60947-3, EN 60947-3 VDE 0660 part 107	A	6	6	6	6
	North America	A	6	6	6	6
Rated Operational Current I_e AC-21A Switching of resistive loads, including moderate overloads	IEC 60947-3, EN 60947-3 VDE 0660 part 107					
	North America					
	1 V/6 V	A	6/3	6/3	-/6	-/6
	12 V/24 V	A	2/1	2/1	6/5	6/5
	48 V/60 V	A	0,8/0,7	0,8/0,7	4/3,7	4/3,7
	110 V	A	0,4	0,4	3	3
	220 V-240 V	A	0,2	0,2	2	2
	380 V-400 V	A	0,13	0,13	1,3	1,3
	440 V/500 V	A	0,1/0,09	0,1/0,09	1/0,9	1/0,9
550 V/600 V	A	0,08/0,05	0,08/0,05	0,8/0,5	0,8/0,5	
Short Circuit Protection						
Max. fuse size	(glass-tube, quick)	A	6	6	6	6
Rated short-time withstand current(1s-current)		A	40	40	65	65
DC Switching Capacity⁵ DC-21B Resistive load T ≤ 1 ms	IEC 60947-3, EN 60947-3 VDE 0660 part 107					
	North America					
	1 V/6 V	A	4/2,5	4/2,5	-/4	-/4
	12 V/24 V	A	1,5/0,8	1,5/0,8	3/2,2	3/2,2
	48 V/60 V	A	0,3/0,27	0,3/0,27	1,2/1	1,2/1
	110 V	A	0,2	0,2	0,6	0,6
	220 V-240 V	A	0,1	0,1	0,3	0,3
	380 V-400 V	A	0,06	0,06	0,2	0,2
	440 V/500 V	A	0,05/0,04	0,05/0,04	0,15/0,12	0,15/0,12
550 V/600 V	A	0,03/0,02	0,03/0,02	0,1/0,1	0,1/0,1	
Max. Permissible Wire Gage - Use copper wire only						
Single-core or stranded wire	mm ²	2x2,5	-	2x2,5	-	
	AWG	2x12	-	2x12	-	
Flexible wire (sleeving in accordance to DIN 46228) Flexible AWG wires (without sleeve)	mm ²	2x2,5(1,5)	-	2x2,5(1,5)	-	
	AWG	2x14	-	2x14	-	
Connection with insulated ring and fork type terminals	mm	-	≥3,2	-	≥3,2	
	mm	-	≤7,4	-	≤7,4	
Connection with quick connect terminations	mm	6,3	-	6,3	-	
Min. Ambient Temperature of Stages⁴			-25 °C (valid only without optional extra)			
Max. Ambient Temperature of Stages^{4,6}	open at 100 % I_U/I_{th}		55 °C during 24 hours with peaks up to 60 °C			
	enclosed at 100 % I_{the}		35 °C during 24 hours with peaks up to 40 °C			

¹Valid for lines with grounded common neutral termination, overvoltage category III, pollution degree 3. Values for other supply systems on request.

²Valid for lines with grounded common neutral termination, overvoltage category II, pollution degree 3. ³Values for lower voltages on request.

⁴For electromagnetic optional extras see additional data in Catalog 101. ⁵Values for switches with spring return on request.

⁶Storage temperature: -40 °C to 85 °C (in case of temperature below -5 °C no shock load permissible).

Tightening torque of screws

Type	Tightening torque	
DH10	0,8 Nm	7 lb-in
DH10-1	0,8 Nm	7 lb-in
DH10B	0,8 Nm	7 lb-in
DH11	0,8 Nm	7 lb-in
DH11B	0,8 Nm	7 lb-in
DH12	0,8 Nm	7 lb-in
DH12B	0,8 Nm	7 lb-in
DHR10	0,8 Nm	7 lb-in
DHR11	0,8 Nm	7 lb-in
DHR11B	0,8 Nm	7 lb-in
DHR12	0,8 Nm	7 lb-in
DHR12B	0,8 Nm	7 lb-in
DK10	0,8 Nm	7 lb-in
DK10-1	0,8 Nm	7 lb-in
DK11	0,8 Nm	7 lb-in
DK12	0,8 Nm	7 lb-in
DKR12	0,8 Nm	7 lb-in

Two or Four Hole Panel Mounting

	DH10-DHR12 ³	DK10-DKR12	DH10B-DHR12B
A	48 1.89	48 1.89	64 2.52
B	42 1.65	42 1.65	56 2.20
C	4 .16	4 .16	4 .16
D1	5 .20	5 .20	5 .20
E	8-19 .31-.75	15-19 .59-.75	10-22 .39-.87
E22	11-15 .43-.59	-	-
EF	15-19 .59-.75	-	19-22 .75-.87
E	30 1.17	-	-
F	36(48) 1.42(1.89)	-	48 1.89
M²	5,5 .22	-	5,5 .22

²M, additional length for mounting ER, ERF only
³Dimensions in () for ER, ERF mounting plate only

< back to table of contents >

EG
EGF

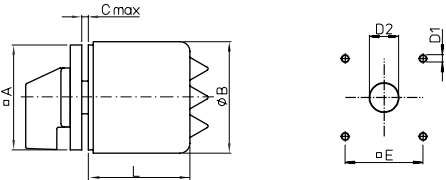
	DH10-DHR12
A	64 2.52
B	42 1.65
C	4 .16
D1	5 .20
EG	10-22 .31-.87
EGF	19-22 .75-.87
E	48 1.89
M	6,7 .26

KN1
KD1
KN2

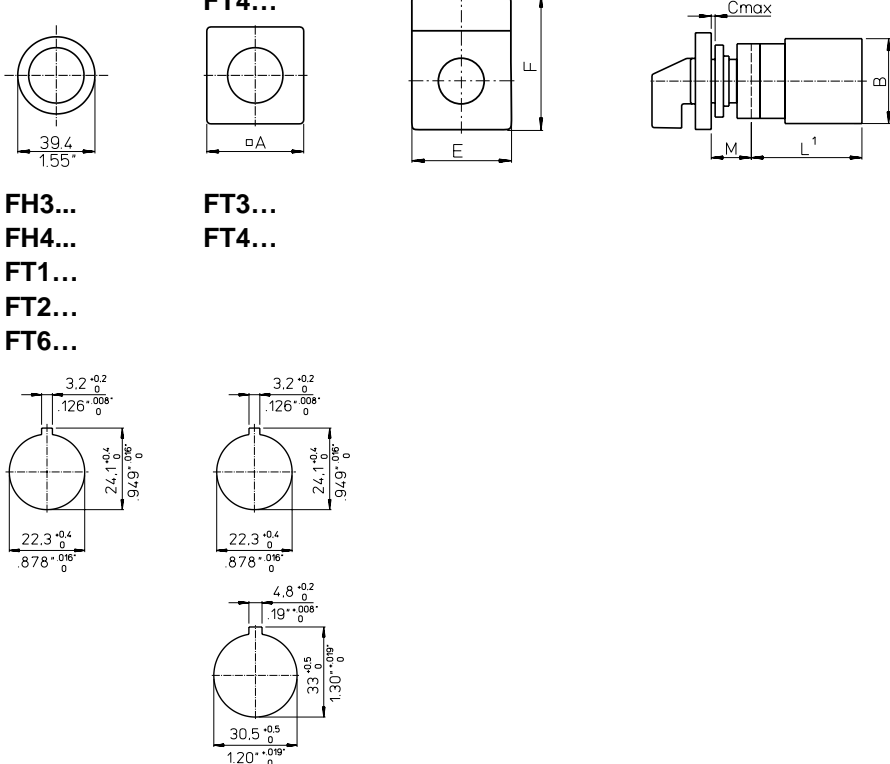
	KN2	DH10-DHR12	KN1	DH10-DHR12	DH10B-DHR12B
A	48 1.89	48 1.89	64 2.52	64 2.52	64 2.52
B	42 1.65	42 1.65	42 1.65	56 2.20	56 2.20
C	4 .16	4 .16	4 .16	4 .16	4 .16
D1	5 .20	5 .20	5 .20	5 .20	5 .20
D2	8-19 .31-.75	8-19 .31-.75	10-22 .31-.87	10-22 .31-.87	10-22 .31-.87
E	36 1.42	36 1.42	48 1.89	48 1.89	48 1.89
M	5,2 .20	5,2 .20	4,7 .19	12 .47	12 .47

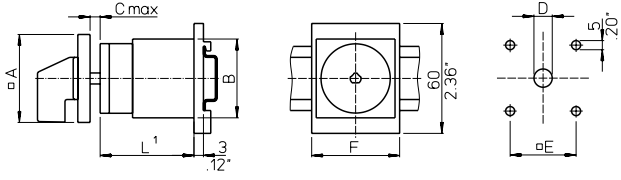
¹see page 46

Four Hole Panel Mounting or Single Hole Mounting and Base Mounting

EC ED		Stages L		DH10- DHR12	DH10B- DHR12B	DH10- DHR12	DH10B- DHR12B
		1	104	64	A	64	64
		2	4.10	2.52	B	2.52	2.52
		3	104	84	C	4	4
		4	4.10	3.31	D1	.16	.16
		5	104	104	D2	4	4
		6	4.10	4.10	D2	.16	.16
		7	-	127	E	5	5
		8	-	5.00	EC	C	4
		9	-	139,5	ED	C	4
		10	-	5.49	EC	D2	10-22
		11	-	164,5	ED	D2	.39-.87
		12	-	6.48	EC	D2	19-22
		13	-	177	ED	D2	.75-.87
		14	-	6.97	EC	E	48
		15	-	-	ED	E	1.89

¹ 1-3 ST B = 68 / 4-7 ST B = 88

FH3... FH4... FT1... FT2... FT3... FT4... FT6...		Stages L		DH10- DHR12	DK10- DKR12	DH10- DHR12	DK10- DKR12
		A/E	48	48	FH3...	64	64
		B	1.89	1.89	FH4...	2.52	2.52
		C	64	64	FH3...	42	42
		F	2.52	2.52	FH4...	1.65	1.65
		M	6	6	FH3...	.24	.24
		FH3...	59	59	FH4...	3.09	3.09
		FH4...	2.32	2.32	FH3...	18,2	3,7
FH3...	78,5	78,5	FH4...	.72	.15		
FH4...	3,09	3,09	FH3...	25,2	3,7		
FH3...	.99	.15	FH4...	.99	.15		
FH4...	25,2	25,2	FH3...	25,2	25,2		
FH4...	.99	.99	FH4...	.99	.99		

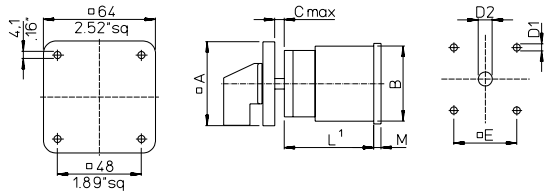
VE1		DH10- DHR12	DH10B- DHR12B
		A	48
		B	1.89
		C	64
		D	2.52
		E	56
		F	1.65
		VE1	2.20
VE1	10,5		
VE1	.41		
VE1	13,5		
VE1	.53		
VE1	8-15		
VE1	.31-.59		
VE1	.39-.59		
VE1	36		
VE1	48		
VE1	1.42		
VE1	1.89		
VE1	48		
VE1	70		
VE1	1.89		
VE1	2.76		

< back to table of contents >

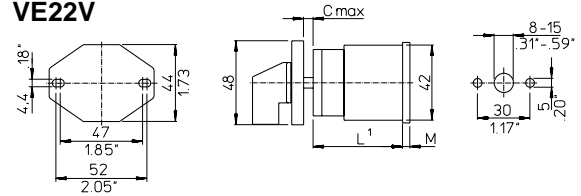
¹ see page 46

Base Mounting

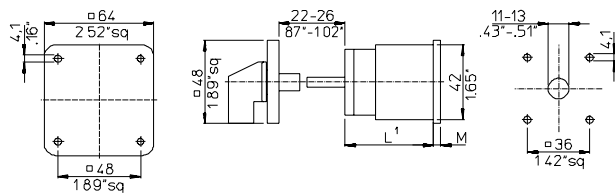
**VE
VE-V**



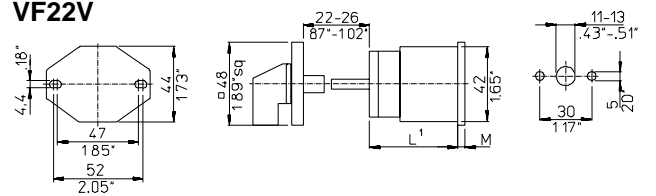
**VE22
VE22V**



**VF
VF-V**



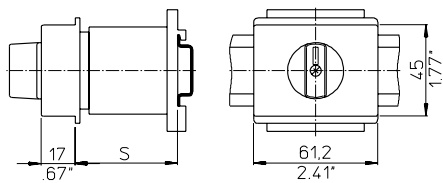
**VF22
VF22V**



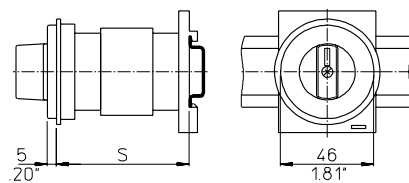
	DH10- DHR12	DH10B- DHR12B		DH10- DHR12	DH10B- DHR12B
A	48 1.89	64 2.52		36 1.42	48 1.89
B	42 1.65	56 2.20	VE M	3.2 .13	2.5 .10
C	10.5 .41	13.5 .53	VE22 M	1.9 .07	-
D1	5 .20	5 .20	VF M	3.2 .13	-
D2	8-19 .31-.75	10-22 .39-.87	VF22 M	1.9 .07	-

[< back to table of contents >](#)

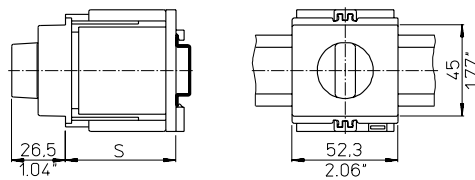
VE2



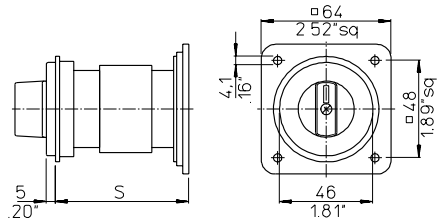
VE3



VE21



VE4



	VE2 DH10- DHR12 Max. no. of stages	VE3 DH10- DHR12 Max. no. of stages	VE4 DH10- DHR12 Max. no. of stages	S_{min.}	VE21 DH10- DHR12 No. of stages
S = 46 1.80	1	-	-	44 1.73	1
S = 50 1.97	-	1	1	54 2.13	2
S = 61 2.40	2	1	1	72 2.83	3
S = 67 2.64	-	2	2		
S = 69 2.70	-	2	2		

¹see page 46

Wall Mounting, Escutcheon Plates and Additional Length

**UE1
UE2
UE3**

Lamp

**DH10-
DHR12**

B 42
 1.65

Escutcheon plates for mounting E, EF, ER, ERF, EG, EGF, KN1, KD1, KN2, EC, ED, VE, VE1, VF

Size	A	B	C
S0	48 1.89	59 2.32	6,7 .26
S1	64 2.52	78 3.07	7,4 .29

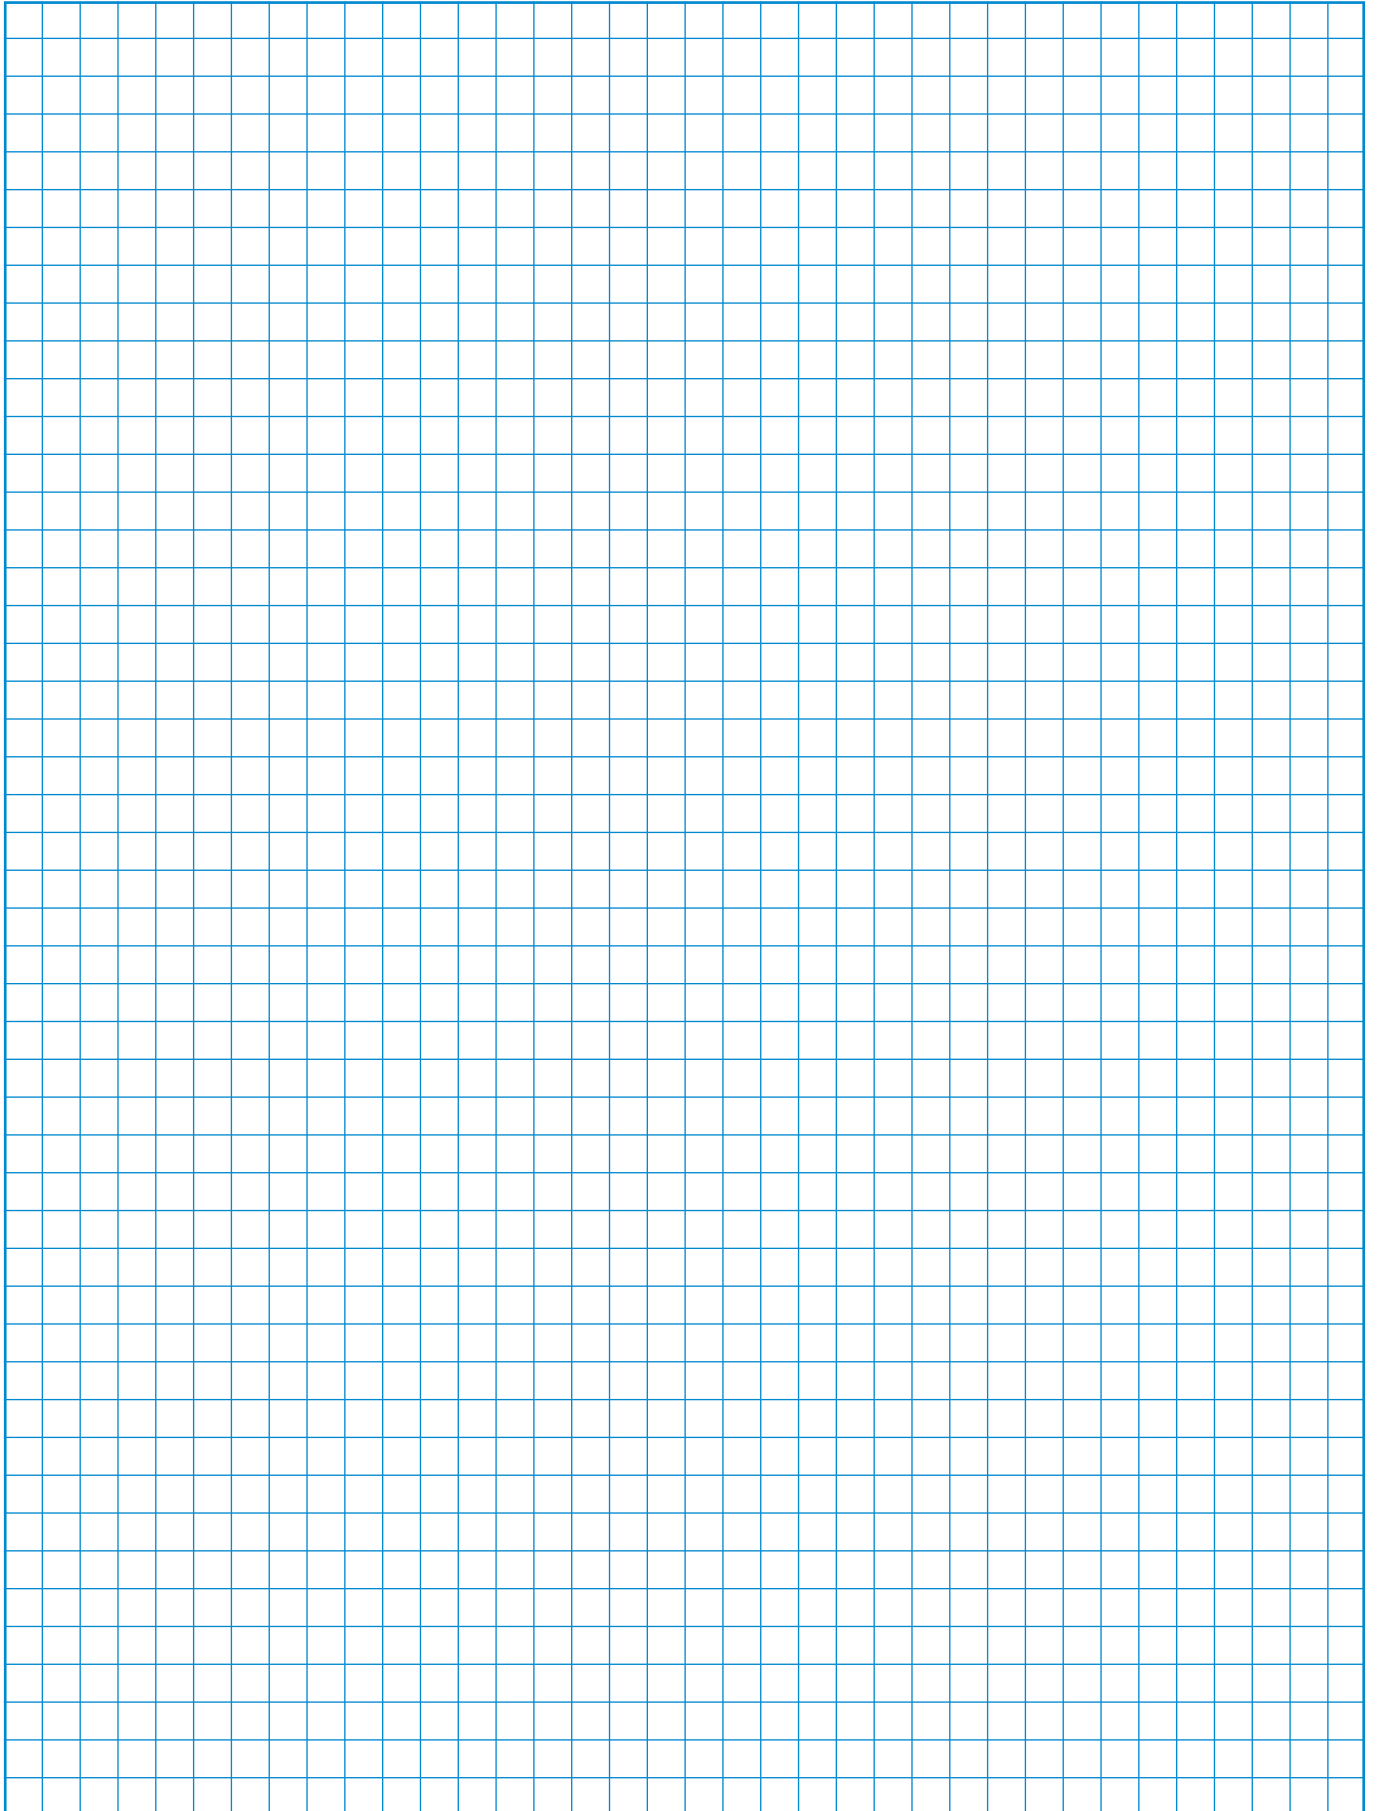
Quick connects for switches DH and DK (page 6)

Length L

Stages	DH10 DH11 DH12	DHR10 DHR11 DHR12	DK10 DK11 DK12	DKR12	DH10B DH11B DH12B	DHR11B DHR12B
1	43,5 1,71	43,5 1,71	61 2,4	61 2,4	48,9 1,93	48,9 1,93
2	61 2,4	61 2,4	78,5 3,09	78,5 3,09	66,4 2,61	66,4 2,61
3	78,5 3,09	78,5 3,09	96 3,78	96 3,78	83,9 3,30	83,9 3,30
4	96 3,78	96 3,78	113,5 4,47	113,5 4,47	101,4 3,99	101,4 3,99
5	113,5 4,47	113,5 4,47	131 5,16	131 5,16	118,9 4,68	118,9 4,68
6	131 5,16	131 5,16	148,5 5,85	148,5 5,85	136,4 5,37	136,4 5,37
7	148,5 5,85	148,5 5,85	166 6,54	166 6,54	153,9 6,06	153,9 6,06
8	166 6,54	166 6,54	183,5 7,22	183,5 7,22	171,4 6,75	171,4 6,75
9	183,5 7,22	183,5 7,22	201 7,91	201 7,91	188,9 7,44	188,9 7,44
10	201 7,91	201 7,91	218,5 8,60	218,5 8,60	206,4 8,13	206,4 8,13
11	218,5 8,6	218,5 8,6	236 9,29	236 9,29	223,9 8,81	223,9 8,81
12	236 9,29	236 9,29	253,5 9,98	253,5 9,98	241,4 9,50	241,4 9,50

< back to table of contents >

Notes:



[< back to table of contents >](#)

The Range of “Blue Line” Switchgear

Technical literature covering the following products is available on request.

	Catalog Number
Main Switches and Main Switches with Emergency Function 16 A-315 A Maintenance Switches 20 A-315 A Switch Disconnectors 20 A-315 A According to IEC 60947-3, EN 60947-3, VDE 0660 part 107, IEC 60204, EN 60204 and VDE 0113	500
C, CA and CAD Switches 10 A-315 A and L Switches 350 A-2400 A C, CA and CAD switches are designed for universal application. They are recommended for instrument, isolator, double-throw and motor control. L switches are designed for load and off-load applications. They are used to switch resistive or low inductive loads.	100
Optional Extras and Enclosures The complete product line, a large number of optional extras is available, including door interlocks, push-pull devices, cylinder and padlock attachments, control and indicator devices, AC motor drives, as well as enclosures, both insulated and metal.	101
A and AD Switches 6 A-25 A A and AD switches have 4 contacts in each switching stage. These switches provide an extensive range of switch functions and require a minimum mounting depth. Up to 24 switching positions are possible, with availability of 48 contacts per 12 stage switch column.	110
CG, CH and CHR Switches 10 A-25 A Ultra compact CG, CH and CHR switches are ideally suited for control and instrumentation applications. Switch terminals are “finger-proof” and conveniently accessible for wiring and are delivered open. All CG4 switches offer specially designed gold plated contacts or H-bridges with “cross-wire” contact systems, which facilitates their use in electronic circuitry and chemically aggressive environments.	120
DH, DHR, DK and DKR Switches 6 A-16 A DH, DHR, DK and DKR switches incorporate unique corrosion resistant contacts that permit operation on system voltage as low as 1 V. They have fully enclosed and protected contacts which can be operated either by rotary and/or lateral handle movement. D switches are used in calibration and semiconductor circuits. They are also used for relay and contactor control.	130
X Switches 200 A-630 A X switches can be applied for load, tap and gang switching duties. They incorporate 6 contacts in each switching stage. Their compact design provides a minimum length dimension for mounting purposes.	140
KG Switches 20 A-315 A and KH and KHR Switches 16 A-80 A KG, KH and KHR switches are excellent circuit interruptors. They have high through fault and fault making capacities and are especially designed for use as isolators and safety switches for machine tools, distribution panels and switchboards. KG ON/OFF switches offer unusually high dimensioned air and creepage distances between terminals which are designed for time saving “straight-line” wiring. ON/OFF switches are available with up to 8 poles and double-throw switches are available with up to 4 poles.	150
Push Buttons and Pilot Lights, 22,5 mm Ø A complete range of state-of-the-art push buttons and pilot lights represent an ideal combination of functional security and economical efficiency in a modular design.	302

Australia

Kraus & Naimer Pty. Ltd.
379 Liverpool Road, ASHFIELD, N.S.W. 2131
P: 1800 567 948
E: sales-au@krausnaimer.com

Austria

Kraus & Naimer GmbH
Schumannngasse 39
1180 WIEN
P: +43 1 404 06 0
E: sales-at@krausnaimer.com

Belgium, Luxembourg

Kraus & Naimer B.V.
Ikaros Business Park
Ikaroslaan 2
1930 ZAVENTHEM
P: +32 2 757 0141
F: +32 2 757 1640
E: sales-be@krausnaimer.com

Brazil

Central and South America
Kraus & Naimer Ind. Com. Ltda.
Rua Santa Monica, 1061
Parque Industrial San Jose
P: +55 11 2198 1288
F: +55 11 2198 1251
E: knbrasil@krausnaimer.com.br

Canada

Kraus & Naimer Ltd.
219 Connie Crescent, Unit 13A
CONCORD, Ontario, L4K 1L4
P: +1 905 738 1666
E: sales-ca@krausnaimer.com

Cyprus

ELECTROMATIC CONSTRUCTIONS LTD.
72, Evagoras Pallikarides Str., 2235 LATSIA-Nicosia
P. O. Box 12630, 2251 LATSIA-Nicosia
P: +357 2 48 41 41
F: +357 2 48 57 47
E: electromatic@cytanet.com.cy

Czech Republic

OBZOR, výrobní družstvo Zlín
Na Slanici 378
763 02 ZLÍN
P: +420 577 195 150
F: +420 577 195 152
E: odbyt@obzor.cz

Denmark

THIIM A/S
Transformervej 31
2860 SOEBORG
P: +45 4485 8000
F: +45 4485 8005
E: thiim@thiim.com

Finland

Kraus & Naimer Oy
Kiitoradankuja 8
01530 VANTAA
P: +358 9 825 424 0
E: sales-fi@krausnaimer.com

France

Kraus & Naimer s.a.s.
33, rue Bobillot
75013 PARIS
P: +33 1 58 40 80 80
E: sales-fr@krausnaimer.com

Germany

Kraus & Naimer GmbH
Wikingerstraße 20-28, 76189 KARLSRUHE
Postfach 10 01 24, 76231 KARLSRUHE
P: +49 721 59 88 0
E: sales-de@krausnaimer.com

Great Britain

Kraus & Naimer Ltd.
115 London Road
NEWBURY/BERKSHIRE RG14 2AH
P: +44 1635 262626
F: +44 1635 37807
E: sales-uk@krausnaimer.com

Greece

KALAMARAKIS-SAPOUNAS S. A.
Ionias & Neromilou Str., P. O. Box 46566
13671 ACHARNES/ATHENS
P: +30 2 10 240 6000 6
F: +30 2 10 240 6007
E: kalamarakis.sapounas@ksa.gr

Hungary

GANZ KK KFT.
X. Kőbányai út 41/c, Postfach 87
1475 BUDAPEST
P: +36 1 261 5479
E: ganzkk@ganzkk.hu

Iceland

JOHAN RÖNNING LTD.
Klettgarðar 25
104 REYKJAVÍK
P: +354 5200 800
E: ronning@ronning.is

Republic of Ireland

Kraus & Naimer Ltd.
4235 Atlantic Avenue
Westpark Business Campus
Shannon, Co. Clare
P: +353 61 704700
F: +353 61 471084
E: sales-ie@krausnaimer.com

Italy

Kraus & Naimer s.r.l.
Via Terracini, 9
24047 TREVIGLIO (BG)
P: +39 0363 30 11 12
E: sales-it@krausnaimer.com

Japan

Kraus & Naimer Ltd.
Yoshiwada Building 2F
1-11-6 Hamamatsucho
Minato-Ku, TOKYO 105-0013
P: +81 3 3436 6151
F: +81 3 3436 6325
E: sales-jp@krausnaimer.com

Mexico

JC INGENIERÍA Y CONTROL, SA DE CV.
Ángel Gavilño 30.
C. Satélite, C. Medicos,
Naucalpan Edo. de Mexico, C.P. 53100
P: +52 55 55 62 75 77
F: +52 55 55 62 04 34
E: ventas@jcingenieriacontrol.com

Netherlands

Kraus & Naimer B.V.
Wegtersweg 38-40, Postbus 199
7556 BR HENGEL0 (Ov.)
P: +31 74 291 9441
F: +31 74 291 98380
E: sales-nl@krausnaimer.com

New Zealand

Kraus & Naimer Ltd.
42 Miramar Avenue, WELLINGTON 6022
P. O. Box 15-009, WELLINGTON 6243
P: + 64 0800 736 522
E: sales-nz@krausnaimer.com

Norway

Kraus & Naimer AB Avd. Norge
Postboks 27 Vollebakk
0516 Oslo
P: +47 22 64 44 20
E: sales-no@krausnaimer.com

Poland

ASTAT LOGISTYKA SP. Z O.O.
Dąbrowskiego 441
60451 POZNAŃ
P: +48 61 849 80 89
E: k.swiderski@astat.pl

Portugal

ELECTRICOL-DAMAS, FERREIRA & DAMASCENO, LDA.
Apartado 1063, S. Ant. Cavaleiros
2670 LOURES
P: +351 21 989 8939
F: +351 21 988 6464
E: electrical@electricol.pt

Singapore, India, Middle East – UAE

Kraus & Naimer Pte. Ltd.
115A, Commonwealth Drive
#03-17/23
SINGAPORE 149 596
P: +65 6473 8166
E: sales-sg@krausnaimer.com

Slovenia

SCHRACK TECHNIK D.O.O.
Pameče 175
SI-2380 SLOVENJ GRADEC
P: +386 2 88 392 00
F: +386 2 88 434 71
E: d.goljat@schrack.si

Republic of South Africa

Kraus & Naimer Pty. Ltd.
7 Village Crescent, Linbro Village
Linbro Business Park, SANDTON 2065
P. O. Box 511, KELVIN 2054
P: +27 11 608 6060
E: sales-za@krausnaimer.com

Spain

Kraus & Naimer B.V.
P: +34 662 696 014
E: sales-es@krausnaimer.com

Sweden

Kraus & Naimer AB
Dr. Widerströms Gata 11, Hågersten
Box 42097, 126 14 STOCKHOLM
P: +46 8 97 00 80
E: sales-se@krausnaimer.com

Switzerland

AWAG Elektrotechnik AG
Sandbühlstraße 2
CH-8604 VOLKETSCHWIL
P: +41 44 908 19 19
E: info@awag.ch

Turkey

KARDES ELEKTRİK SANAYİ VE TİCARET A.S.
Yassıören Mah. Hıfıa Sok. No: 4
34277 Arnavutköy-Istanbul-Turkey
P: +90 212 624 92 04 118
F: +90 212 592 48 10
E: info@unalkardes.com.tr

USA

Kraus & Naimer Inc.
760 New Brunswick Road
SOMERSET, NJ 08873
P: +1 732 560 1240
E: sales-us@krausnaimer.com



Kraus & Naimer



Contact us:

www.krausnaimer.com